
AERODROME GROUND MOVEMENT CHART - ICAO

APRON ELEV 6 m

TWR 118.2(E) 118.8(W) GND 121.75(E) 121.7(W) APRON 121.65 122.175 123.675 121.8 123.325

SEOUL / Incheon Intl RWY 15L/R, 33L/R DEPARTURE

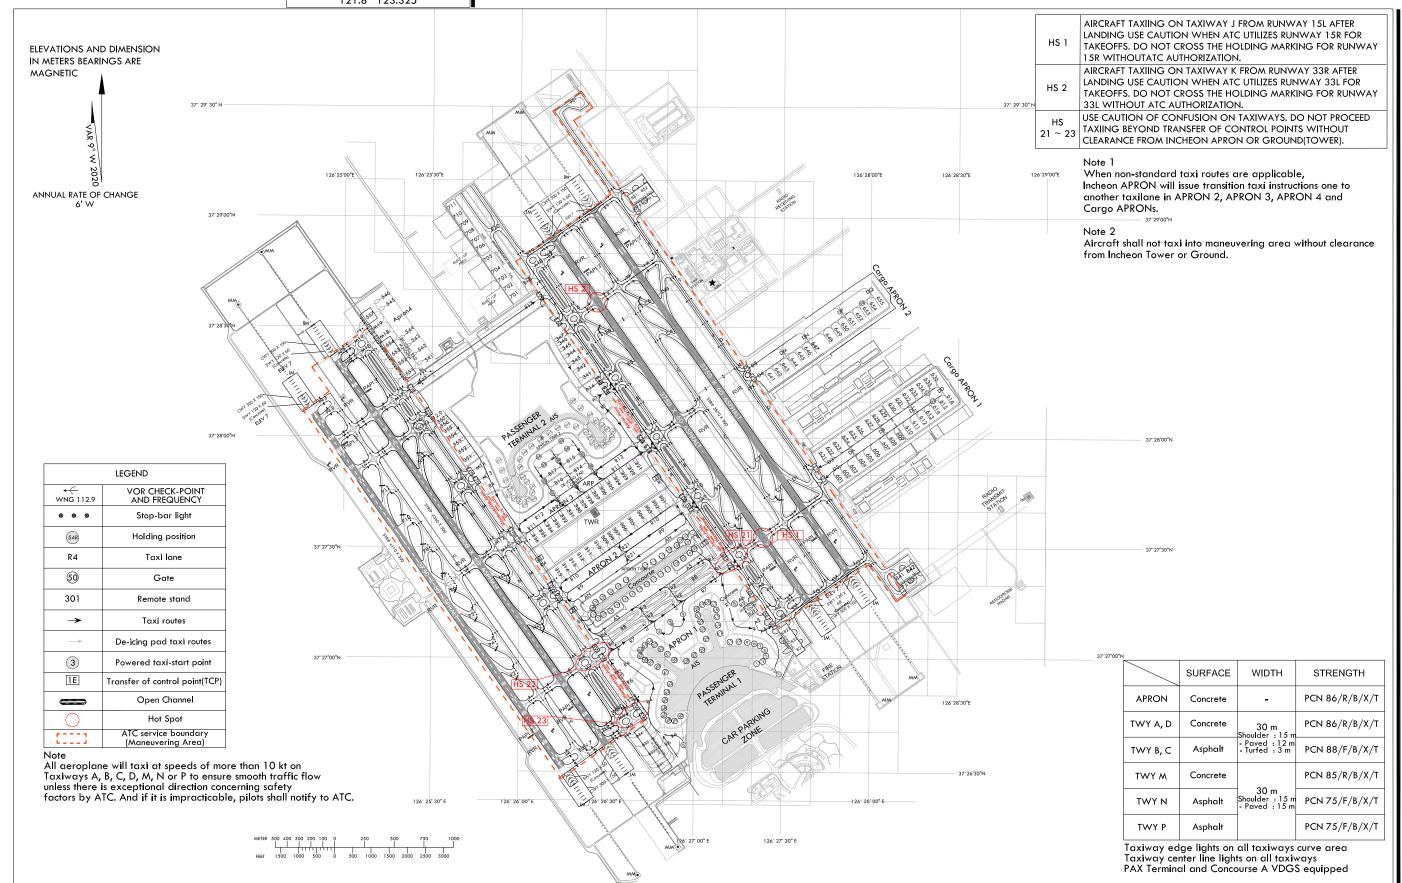



AERODROME GROUND
MOVEMENT CHART - ICAO

APRON ELEV 6 m

TWR 118.2(E) 118.8(W)
GND 121.75(E) 121.7(W)
APRON 121.65 122.175 123.675
121.8 123.325

SEOUL / Incheon Intl RWY 15L/R, 33L/R ARRIVAL

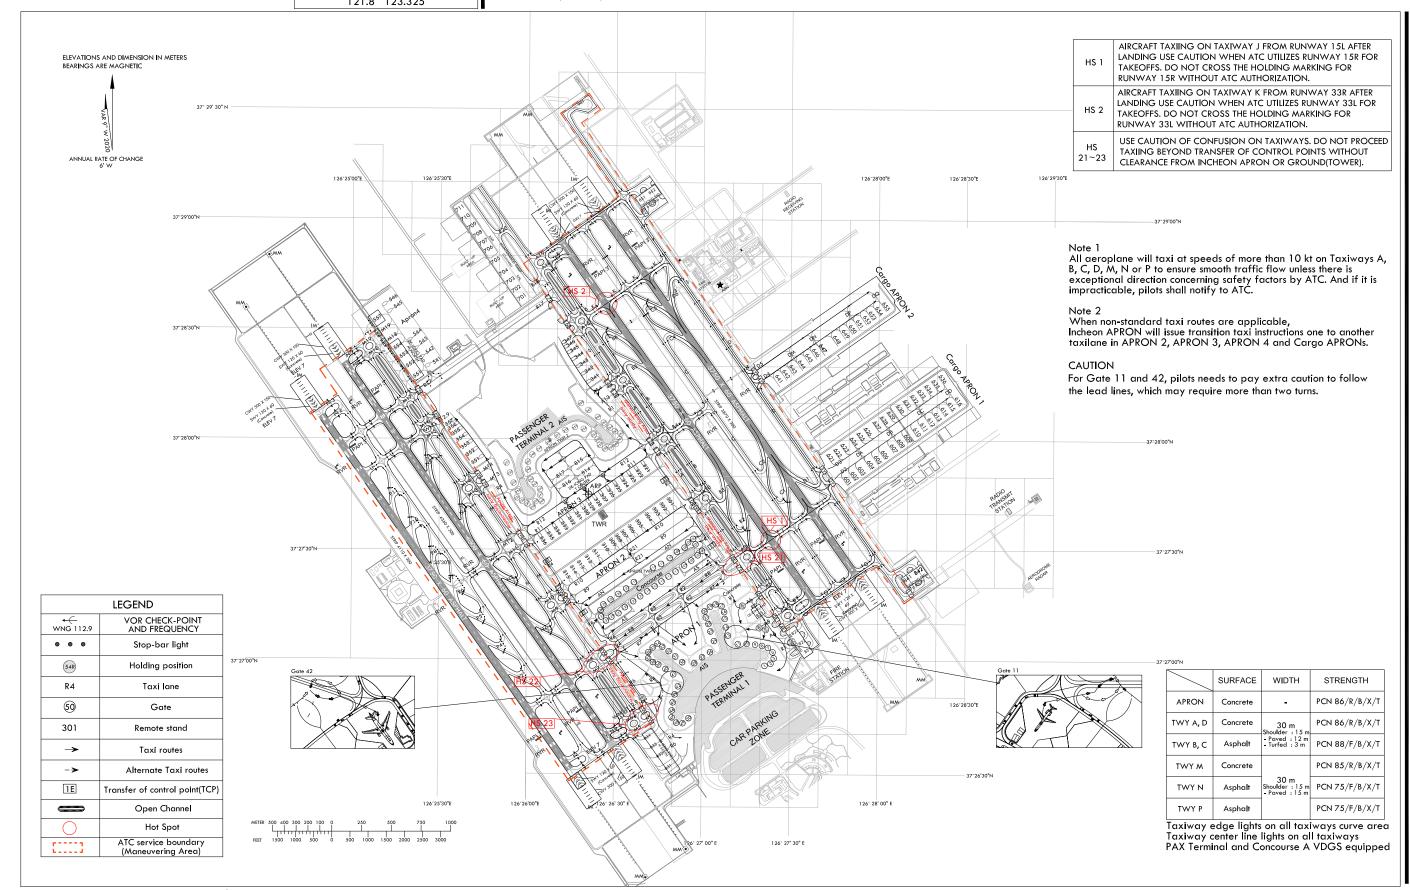

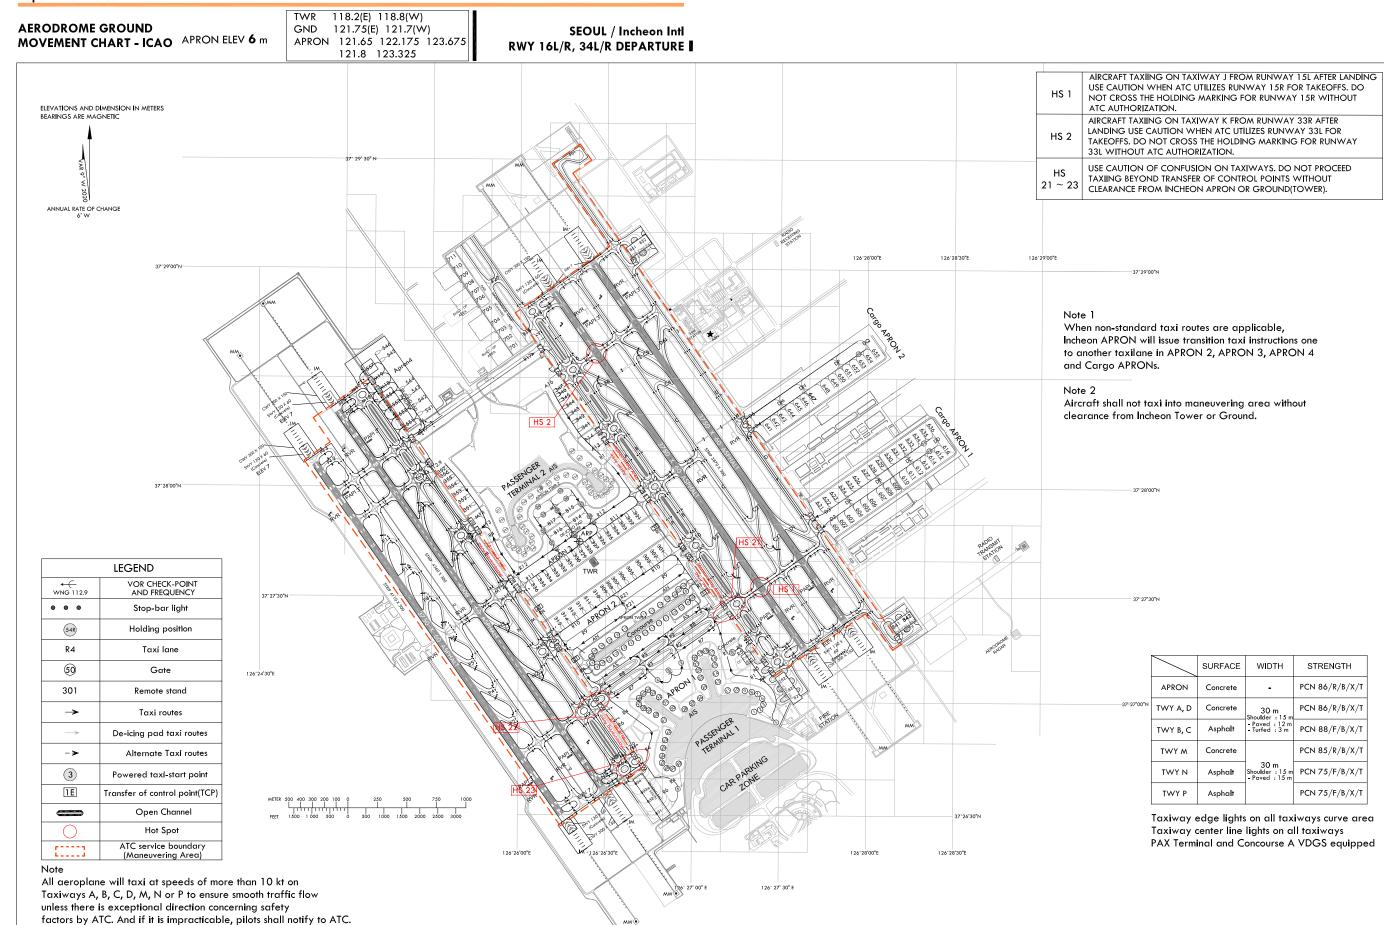

118.2(E) 118.8(W)

AERODROME GROUND GND 121.75(E) 121.7(W) SEOUL / Incheon Intl APRON ELEV 6 m APRON 121.65 122.175 123.675 **MOVEMENT CHART - ICAO** RWY 16L/R, 34L/R ARRIVAL 121.8 123.325 AIRCRAFT TAXIING ON TAXIWAY J FROM RUNWAY 15L AFTER LANDING USE CAUTION WHEN ATC UTILIZES RUNWAY 15R FOR TAKEOFFS. DO NOT CROSS THE HOLDING MARKING FOR RUNWAY 15R WITHOUT ATC AUTHORIZATION. ELEVATIONS AND DIMENSION IN METERS BEARINGS ARE MAGNETIC AIRCRAFT TAXIING ON TAXIWAY K FROM RUNWAY 33R AFTER LANDING USE CAUTION WHEN ATC UTILIZES RUNWAY 33L FOR TAKEOFFS. DO NOT CROSS THE HOLDING MARKING FOR RUNWAY 33L WITHOUT ATC AUTHORIZATION. USE CAUTION OF CONFUSION ON TAXIWAYS. DO NOT PROCEED TAXIING BEYOND TRANSFER OF CONTROL POINTS WITHOUT 21~23 CLEARANCE FROM INCHEON APRON OR GROUND(TOWER). ANNUAL RATE OF CHANGE All aeroplane will taxi at speeds of more than 10 kt on Taxiways A, B, C, D, M, N or P to ensure smooth traffic flow unless there is exceptional direction concerning safety factors by ATC. And if it is impracticable, pilots shall notify to ATC. When non-standard taxi routes are applicable, Incheon APRON will issue transition taxi instructions one to another taxilane in APRON 2, APRON 3, APRON 4 and Cargo APRONs. CAUTION For Gate 11 and 42, pilots needs to pay extra caution to follow the lead lines, which may require more than two turns. LEGEND VOR CHECK-POINT AND FREQUENCY WNG 112.9 Stop-bar light . . . (54R) Holding position R4 Taxi lane 50 Gate SURFACE WIDTH STRENGTH 301 Remote stand PCN 86/R/B/X/T APRON \rightarrow Taxi routes PCN 86/R/B/X/T TWY A, D 30 m -> Alternate Taxi routes - Paved : 12 m - Turfed : 3 m PCN 88/F/B/X/T Asphalt TWY B, C 1E Transfer of control point(TCP) PCN 85/R/B/X/T TWY M Concrete Open Channel houlder : 15 m Paved : 15 m TWY N Asphalt Hot Spot PCN 75/F/B/X/T TWY P Asphalt ATC service boundary (Maneuvering Area) 126°28'30"E Taxiway edge lights on all taxiways curve area Taxiway center line lights on all taxiways PAX Terminal and Concourse A VDGS equipped