

**STANDARD DEPARTURE CHART
INSTRUMENT(SID) - ICAO**

TRANSITION ALT 14 000
TRANSITION LVL FL 140

SACHEON DEP 135.4
YEOSU TWR 122.5
240.9


YEOSU/Yeosu (RKJY)

RWY 17

RNAV ANUBA 1M, RNAV GOSBO 1M

RNAV TEDAN 1M

Note : Departure under ICAO Flight Procedures.

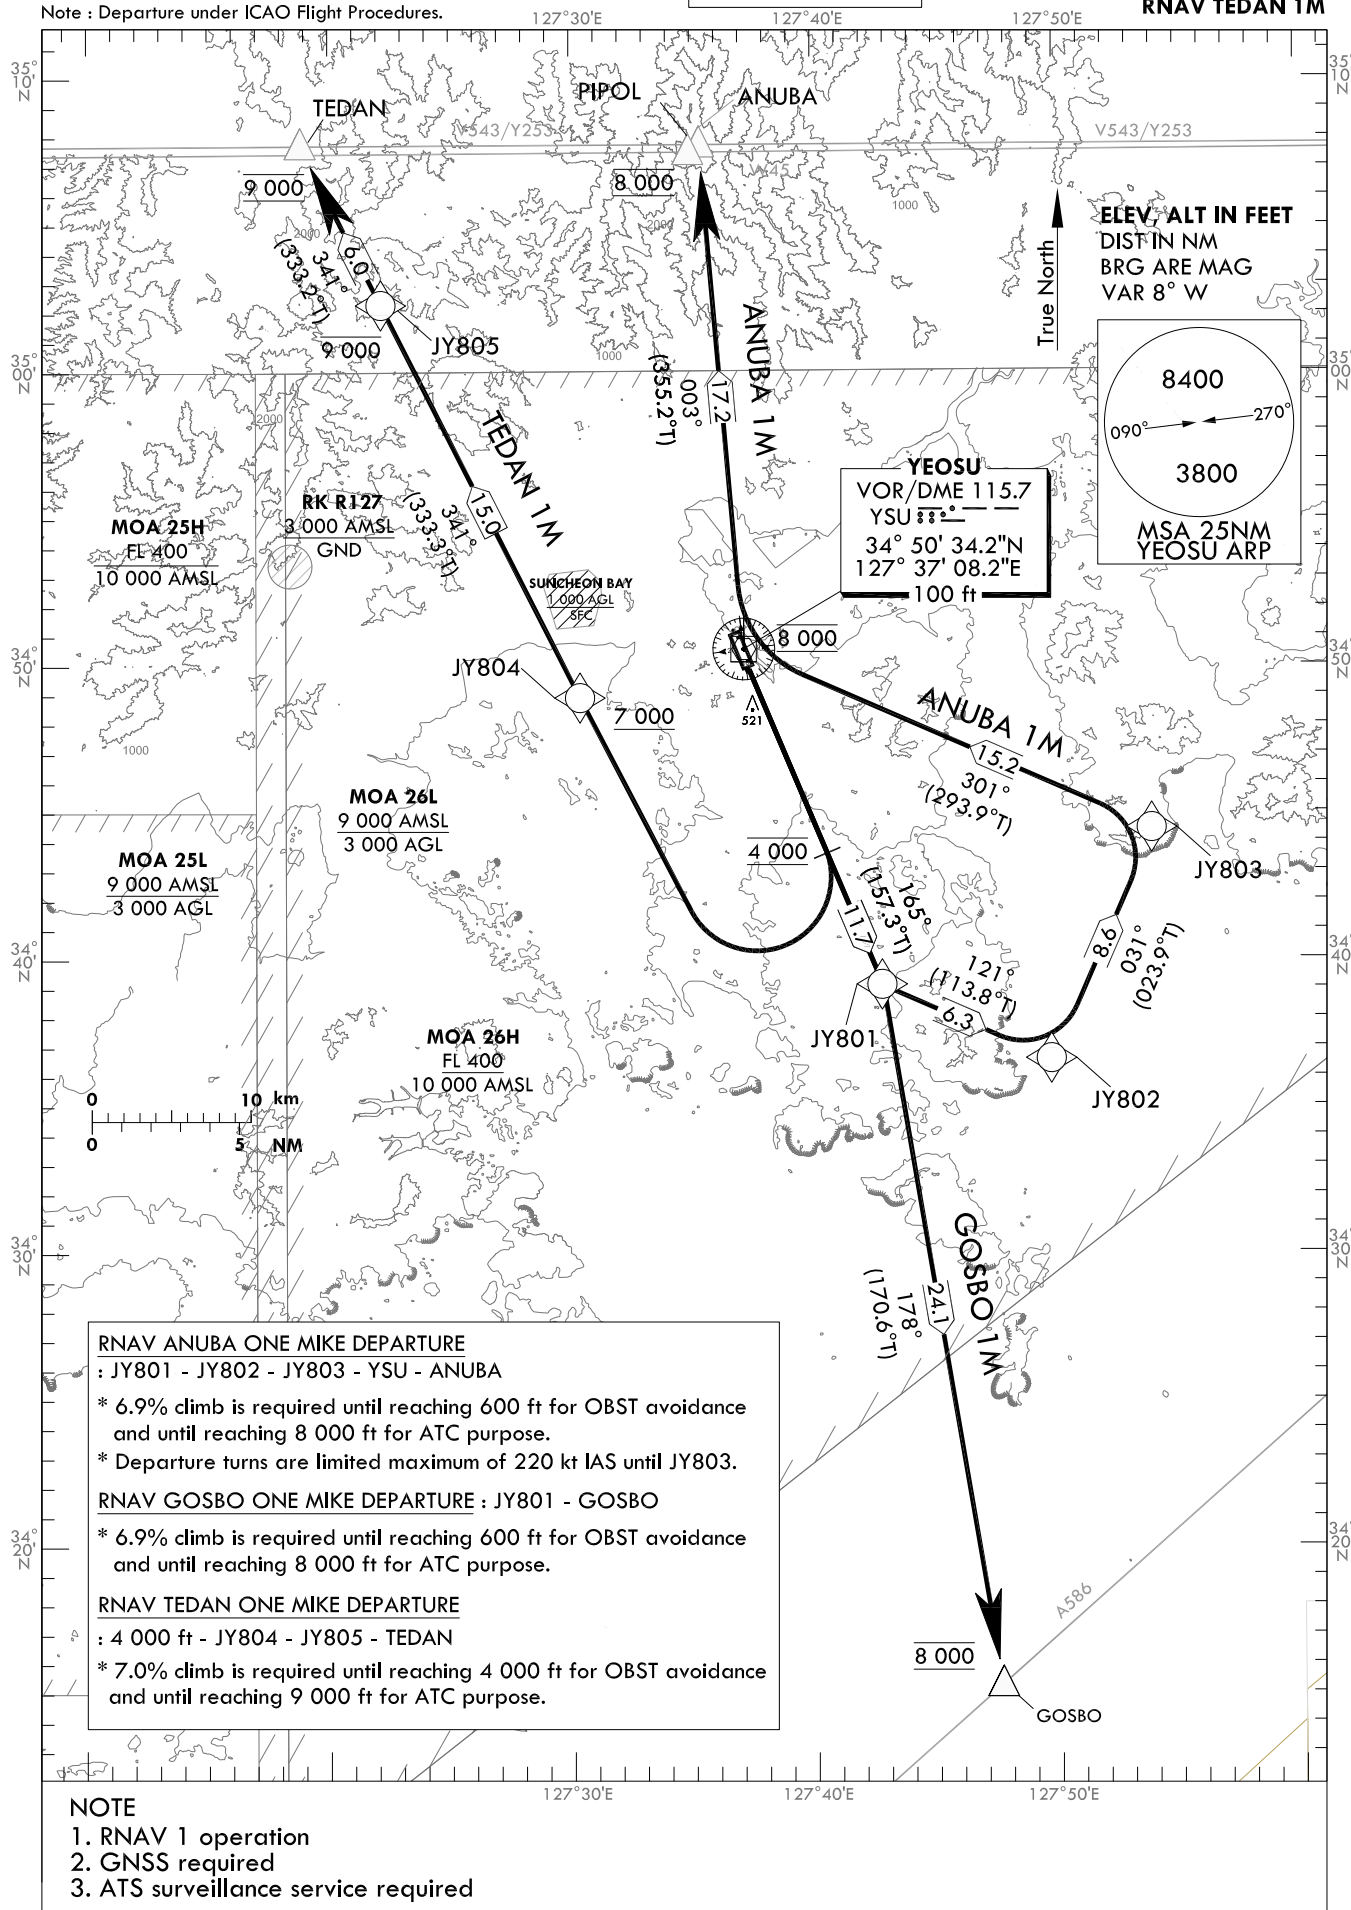

Change : Information of MAG VAR and radial.

OFFICE OF CIVIL AVIATION

AIRAC AIP AMDT 12/16
Effective : 1600UTC 7 DEC 2016

YEOSU/Yeosu (RKJY)

RWY 17

RNAV ANUBA 1M, RNAV GOSBO 1M

RNAV TEDAN 1M

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNAV ANUBA 1M

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
001	CF	JY801	-	165(157.3)	11.7	-	-	-220	343905.5N 1274249.7E	-	RNAV 1	-
002	TF	JY802	-	121(113.8)	6.3	-	-	-220	343632.5N 1274948.6E	-	RNAV 1	-
003	TF	JY803	-	031(023.9)	8.6	-	-	-220	344425.1N 1275402.0E	-	RNAV 1	-
004	TF	YSU	-	301(293.9)	15.2	-	@8 000	-	345034.2N 1273708.2E	-	RNAV 1	-
005	TF	ANUBA	-	003(355.2)	17.2	-	@8 000	-	350745.9N 1273522.8E	-	RNAV 1	-

RNAV GOSBO 1M

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
001	CF	JY801	-	165(157.3)	11.7	-	-	-	343905.5N 1274249.7E	-	RNAV 1	-
002	TF	GOSBO	-	178(170.6)	24.1	-	@8 000	-	341516.8N 1274734.4E	-	RNAV 1	-

RNAV TEDAN 1M

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
001	CA	-	-	165(157.3)	-	-	@4 000	-	-	-	RNAV 1	-
002	DF	JY804	-	-	-	R	+7 000	-	344855.7N 1273022.5E	-	RNAV 1	-
003	TF	JY805	-	341(333.3)	15.0	-	-9 000	-	350221.9N 1272209.7E	-	RNAV 1	-
004	TF	TEDAN	-	341(333.2)	6.0	-	@9 000	-	350743.8N 1271852.1E	-	RNAV 1	-

Change : Information of Course/Track.

TRANSITION	ALT	14 000
TRANSITION	LVL	FL 140

SACHEON	DEP	135.4
YEOSU	TWR	122.5
		240.9

RWY 17
ANUBA 5S
GOSBO 4S

ANUBA FIVE SIERRA DEPARTURE

Climb on R 165 YSU until YSU D10, then turn Left direct to YSU via R 125 YSU. Then proceed on R 003 YSU to ANUBA.

*** Restrictions**

1. Minimum 6.9% CG is required until 900 ft for OBST avoidance and 8 000 ft for ATC purpose.
2. Departure turns are limited to maximum of 220 kt IAS until YSU D10.
3. Cross YSU at 8 000 ft, then maintain 8 000 ft unless otherwise directed by ATC.

GOSBO FOUR SIERRA DEPARTURE

Climb on R 165 YSU until YSU D5, then turn Right HDG 200° to intercept and proceed on R 174 YSU to GOSBO.

*** Restrictions**

1. Minimum 6.9% CG is required until 900 ft for OBST avoidance and 8 000 ft for ATC purpose.
2. Climb and maintain 8 000 ft unless otherwise directed by ATC.

OFFICE OF CIVIL AVIATION

INTENTIONALLY

LEFT

BLANK

**STANDARD DEPARTURE CHART
INSTRUMENT(SID) - ICAO**

TRANSITION ALT 14 000
TRANSITION LVL FL 140


SACHEON DEP 135.4
YEOSU TWR 122.5
240.9

YEOSU/Yeosu (RKJY)

RWY 35

**RNAV GOSBO 1R, RNAV GOSBO 6R
RNAV ANUBA 1R, RNAV TEDAN 1R**

Note : Departure under ICAO Flight Procedures.

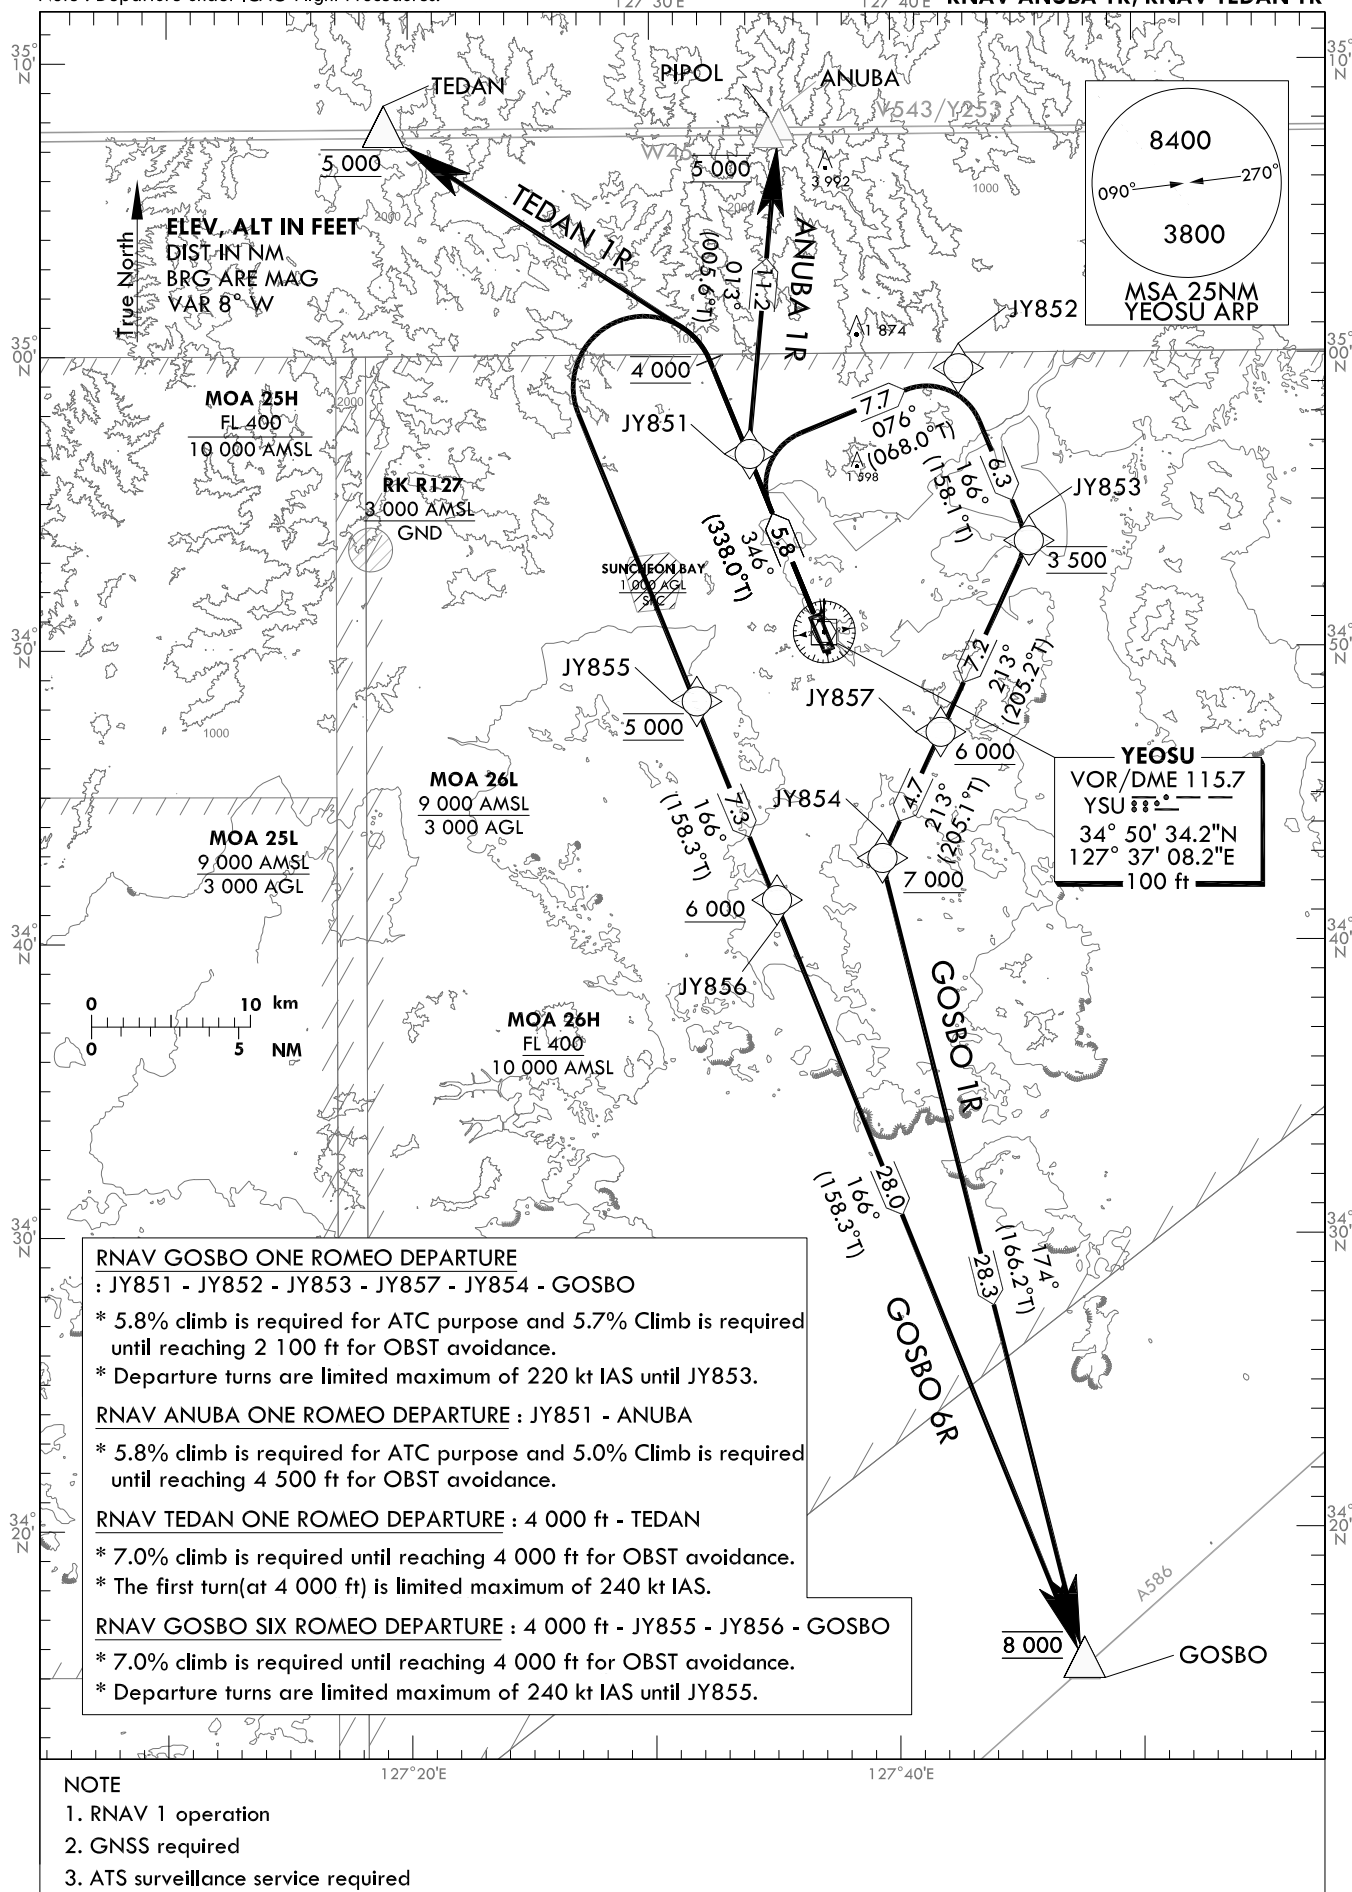

Change : Information of MAG VAR and radial.

OFFICE OF CIVIL AVIATION

AIRAC AIP AMDT 12/16
Effective : 1600UTC 7 DEC 2016

YEOSU/Yeosu (RKJY)

RWY 35

RNAV GOSBO 1R, RNAV GOSBO 6R

RNAV ANUBA 1R, RNAV TEDAN 1R

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

RNAV GOSBO 1R

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
001	CF	JY851	-	346(338.0)	5.8	-	-	-220	345638.1N 1273402.9E	-	RNAV 1	-
002	TF	JY852	-	076(068.0)	7.7	-	-	-220	345931.1N 1274244.3E	-	RNAV 1	-
003	TF	JY853	-	166(158.1)	6.3	-	@3 500	-220	345337.1N 1274537.1E	-	RNAV 1	-
005	TF	JY857	-	213(205.2)	7.2	-	+6 000	-	344705.5N 1274154.0E	-	RNAV 1	-
006	TF	JY854	-	213(205.1)	4.7	-	+7 000	-	344247.3N 1273927.4E	-	RNAV 1	-
007	TF	GOSBO	-	174(166.2)	28.3	-	@8 000	-	341516.8N 1274734.4E	-	RNAV 1	-

RNAV ANUBA 1R

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
001	CF	JY851	-	346(338.0)	5.8	-	-	-	345638.1N 1273402.9E	-	RNAV 1	-
002	TF	ANUBA	-	013(005.6)	11.2	-	@5 000	-	350745.9N 1273522.8E	-	RNAV 1	-

RNAV TEDAN 1R

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
001	CA	-	-	346(338.0)	-	-	@4 000	-240	-	-	RNAV 1	-
002	DF	TEDAN	-	-	-	L	@5 000	-	350743.8N 1271852.1E	-	RNAV 1	-

RNAV GOSBO 6R

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/TCH	Navigation specification	Remarks
001	CA	-	-	346(338.0)	-	-	@4 000	-240	-	-	RNAV 1	-
002	DF	JY855	-	-	-	L	@5 000	-240	344810.7N 1273148.2E	-	RNAV 1	-
003	TF	JY856	-	166(158.3)	7.3	-	+6 000	-	344122.6N 1273504.9E	-	RNAV 1	-
004	TF	GOSBO	-	166(158.3)	28.0	-	@8 000	-	341516.8N 1274734.4E	-	RNAV 1	-

Change : Information of Course/Track.

OFFICE OF CIVIL AVIATION

AIRAC AIP AMDT 12/16
Effective : 1600UTC 7 DEC 2016

**STANDARD DEPARTURE CHART
INSTRUMENT(SID) - ICAO**


TRANSITION ALT 14 000
TRANSITION LVL FL 140

SACHEON DEP 135.4
YEOSU TWR 122.5
240.9

YEOSU/Yeosu (RKJY)

**RWY 35
ANUBA 5N
GOSBO 5N**

Note : Departure under ICAO Flight Procedures.

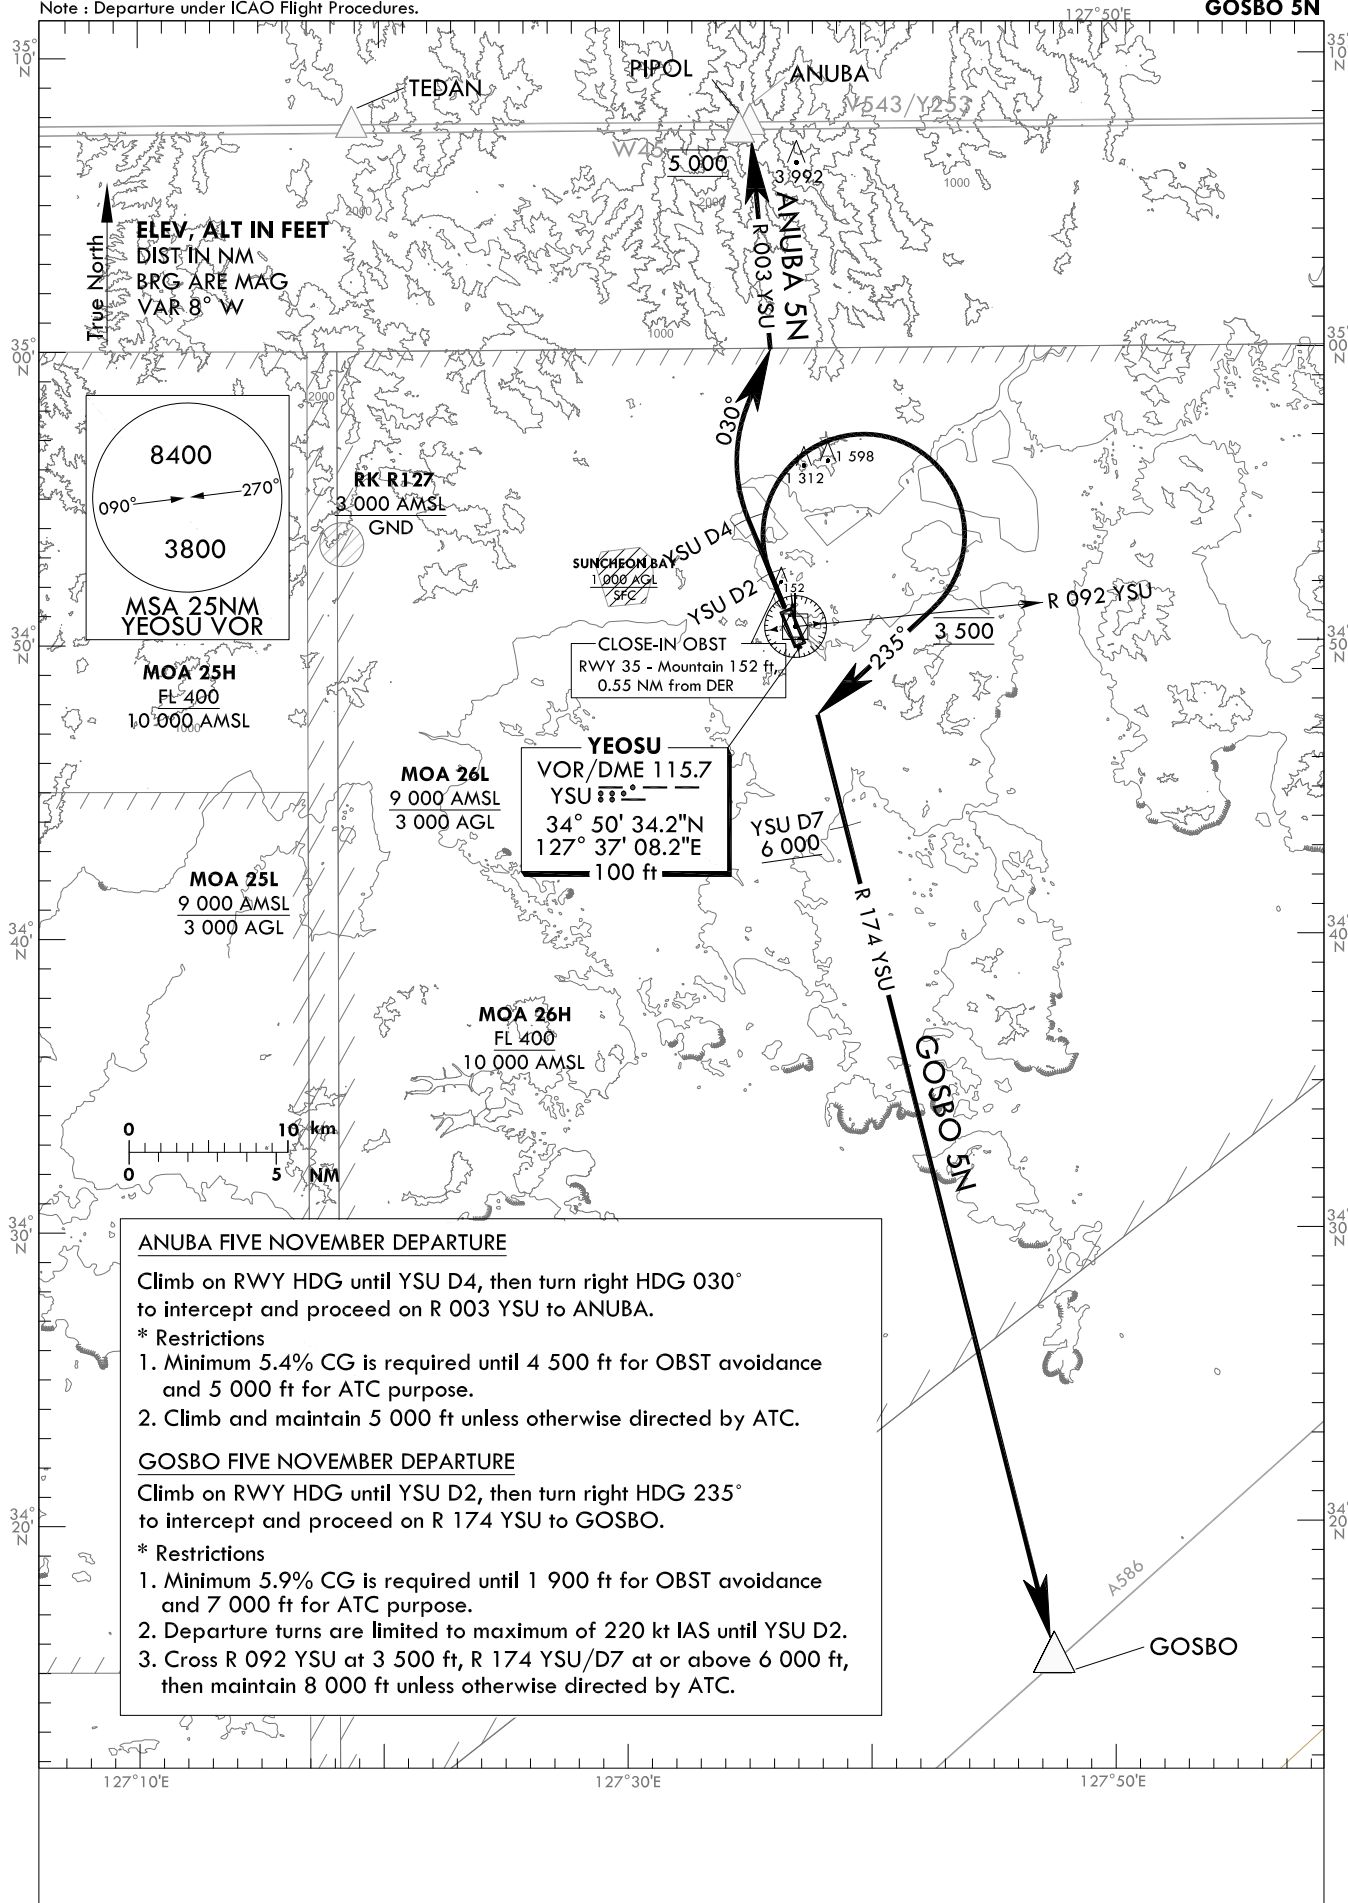

Change : Information of MAG VAR, obstacle, and radial.

INTENTIONALLY

LEFT

BLANK