


**STANDARD DEPARTURE
CHART - INSTRUMENT(SID)**

TRANSITION ALT 14 000
TRANSITION LVL FL 140

GIMHAE DEP 125.5
363.8
GIMHAE TWR 118.1
118.450

BUSAN/Gimhae Intl(RKPK)
RWY 36L/R
RNAV(GNSS) BETTA 2

Note : Departure under U.S. TERPS.

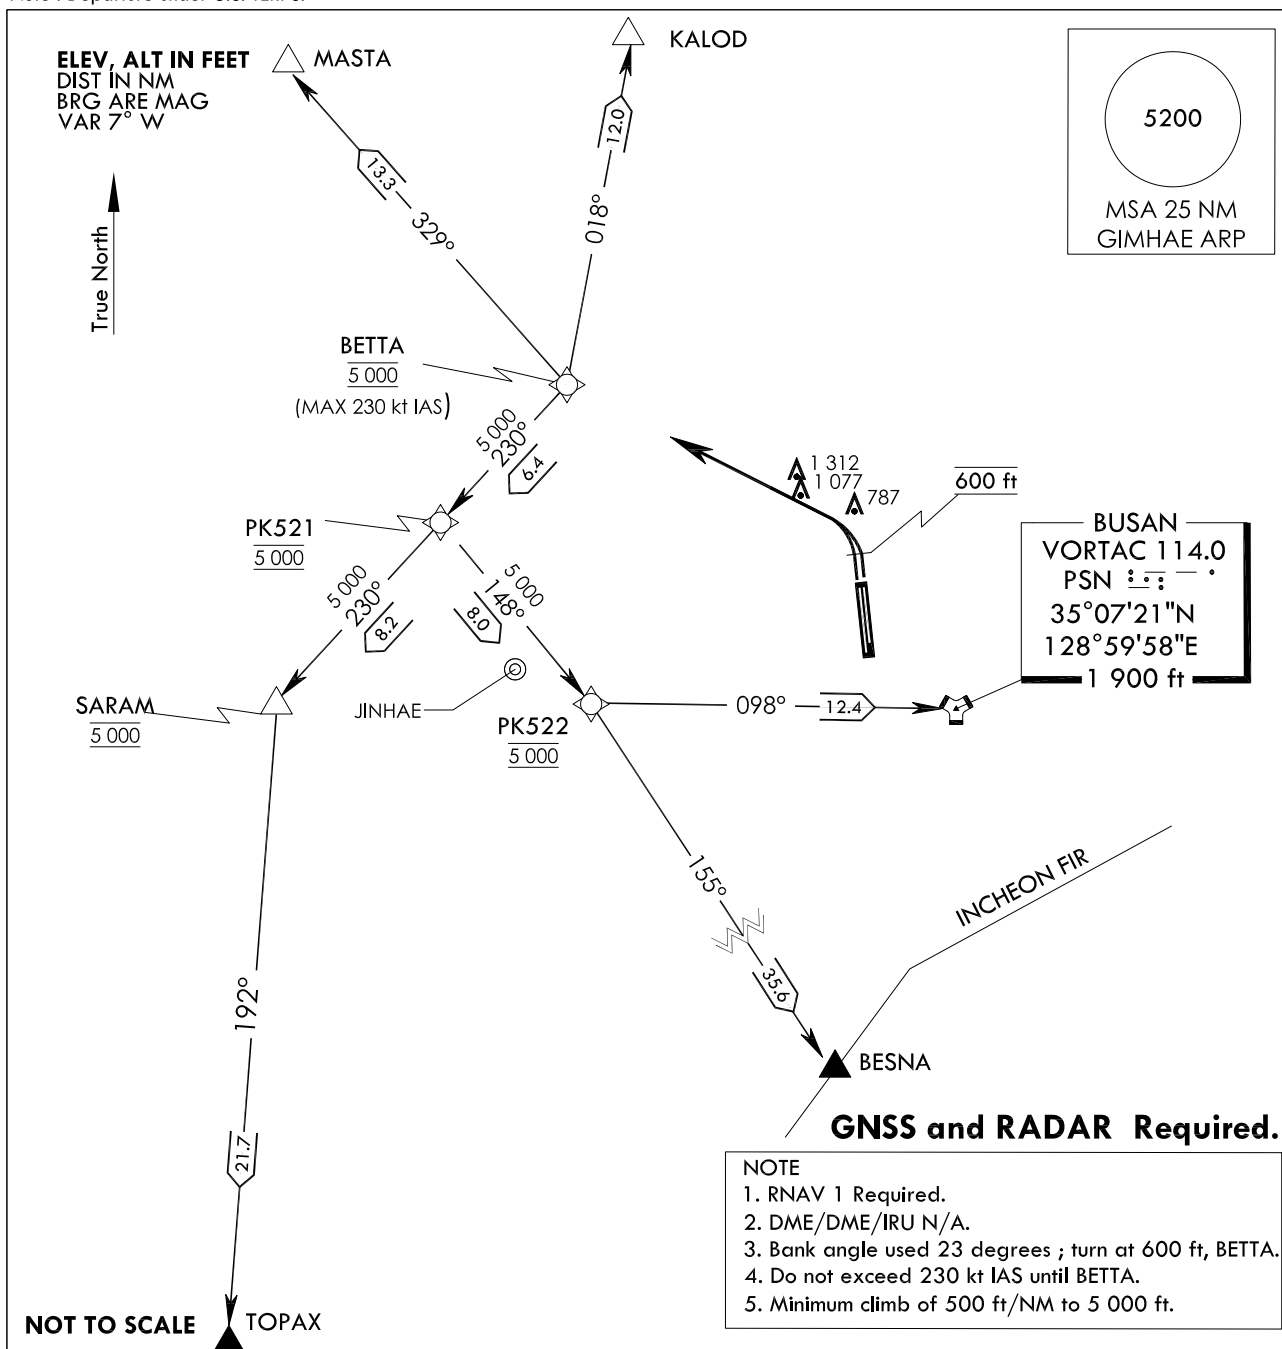

DEPARTURE PROCEDURE DESCRIPTION

BETTA 2 DEPARTURE

RWY 36L/R : Climb HDG 001° to 600 ft then direct to cross BETTA at 5 000 ft, thence.....
..... via (TRANSITIONS routes) and climb assigned altitude by ATC.

KALOD transition : From BETTA on track 018° to KALDO

MASTA transition : From BETTA on track 329° to MASTA

TOPAX transition : From BETTA on track 230° to cross PK521 at 5 000 ft, then track 230° to cross SARAM at 5 000 ft, then track 192° to TOPAX.

BESNA transition : From BETTA on track 230° to cross PK521 at 5 000 ft, then on track 148° to cross PK522 at 5 000 ft, then on track 155° to BESNA.

BUSAN (PSN) transition : From BETTA on track 230° to cross PK521 at 5 000 ft, then track 148° to cross PK522 at 5 000 ft, then track 098° to BUSAN(PSN).

Change : Amended coordinate format.

BUSAN/Gimhae INTL(RKPK)

RWY 36L/R

RNAV(GNSS) BETTA 2

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

Departure Route - RWY 36R

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	-	RWY 18L	-	-	-	-	-	-	35°11'38.60"N 128°56'14.73"E	-	RNAV 1	DER
002	VA	-	-	001.42(353.95)	-	-	@600	-230	-	-	RNAV 1	CG 500 ft/NM to 5 000 ft
003	DF	BETTA	-	-	-	-	@5 000	-230	35°18'24.2"N 128°43'46.2"E	-	RNAV 1	-

Departure Route - RWY 36L

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	-	RWY 18R	-	-	-	-	-	-	35°11'37.94"N 128°56'06.46"E	-	RNAV 1	DER
002	VA	-	-	001.42(353.95)	-	-	@600	-230	-	-	RNAV 1	CG 500 ft/NM to 5 000 ft
003	DF	BETTA	-	-	-	-	@5 000	-230	35°18'24.2"N 128°43'46.2"E	-	RNAV 1	-

RNAV BETTA 2 - BUSAN(PSN VORTAC) Transition

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	TF	PK521	-	229.87(222.40)	6.36	-	@5 000	-	35°13'42.0"N 128°38'32.2"E	-	RNAV 1	-
002	TF	PK522	-	147.69(140.22)	8.04	-	@5 000	-	35°07'30.3"N 128°44'48.6"E	-	RNAV 1	-
003	TF	BUSAN	-	098.07(090.60)	12.44	-	+5 000	-	35°07'21.5"N 128°59'58.5"E	-	RNAV 1	PSN VORTAC

RNAV BETTA 2 - BESNA Transition

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	TF	PK521	-	229.87(222.40)	6.36	-	@5 000	-	35°13'42.0"N 128°38'32.2"E	-	RNAV 1	-
002	TF	PK522	-	147.69(140.22)	8.04	-	@5 000	-	35°07'30.3"N 128°44'48.6"E	-	RNAV 1	-
003	TF	BESNA	-	155.20(147.73)	35.62	-	+5 000	-	34°37'18.0"N 129°07'51.0"E	-	RNAV 1	-

RNAV BETTA 2 - TOPAX Transition

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	TF	PK521	-	229.87(222.40)	6.36	-	@5 000	-	35°13'42.0"N 128°38'32.2"E	-	RNAV 1	-
002	TF	SARAM	-	229.82(222.35)	8.23	-	@5 000	-	35°07'36.3"N 128°31'46.7"E	-	RNAV 1	-
003	TF	TOPAX	-	191.64(184.17)	21.71	-	+5 000	-	34°45'55.3"N 128°29'51.7"E	-	RNAV 1	-

RNAV BETTA 2 - MASTA Transition

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	TF	MASTA	-	328.96(321.49)	13.25	-	+5 000	-	35°28'47.0"N 128°33'40.0"E	-	RNAV 1	-

RNAV BETTA 2 - KALOD Transition

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	TF	KALOD	-	017.96(010.49)	11.98	-	+5 000	-	35°30'12.1"N 128°46'26.5"E	-	RNAV 1	-

Change : Amended coordinate format.


**STANDARD DEPARTURE
CHART - INSTRUMENT(SID)**

TRANSITION ALT 14 000
TRANSITION LVL FL 140

GIMHAE DEP 125.5
363.8
GIMHAE TWR 118.1
118.450

BUSAN/Gimhae Intl(RKPK)
RWY 36L/R
RWY 18L/R
GIMHAE 2

Note : Departure under U.S. TERPS.

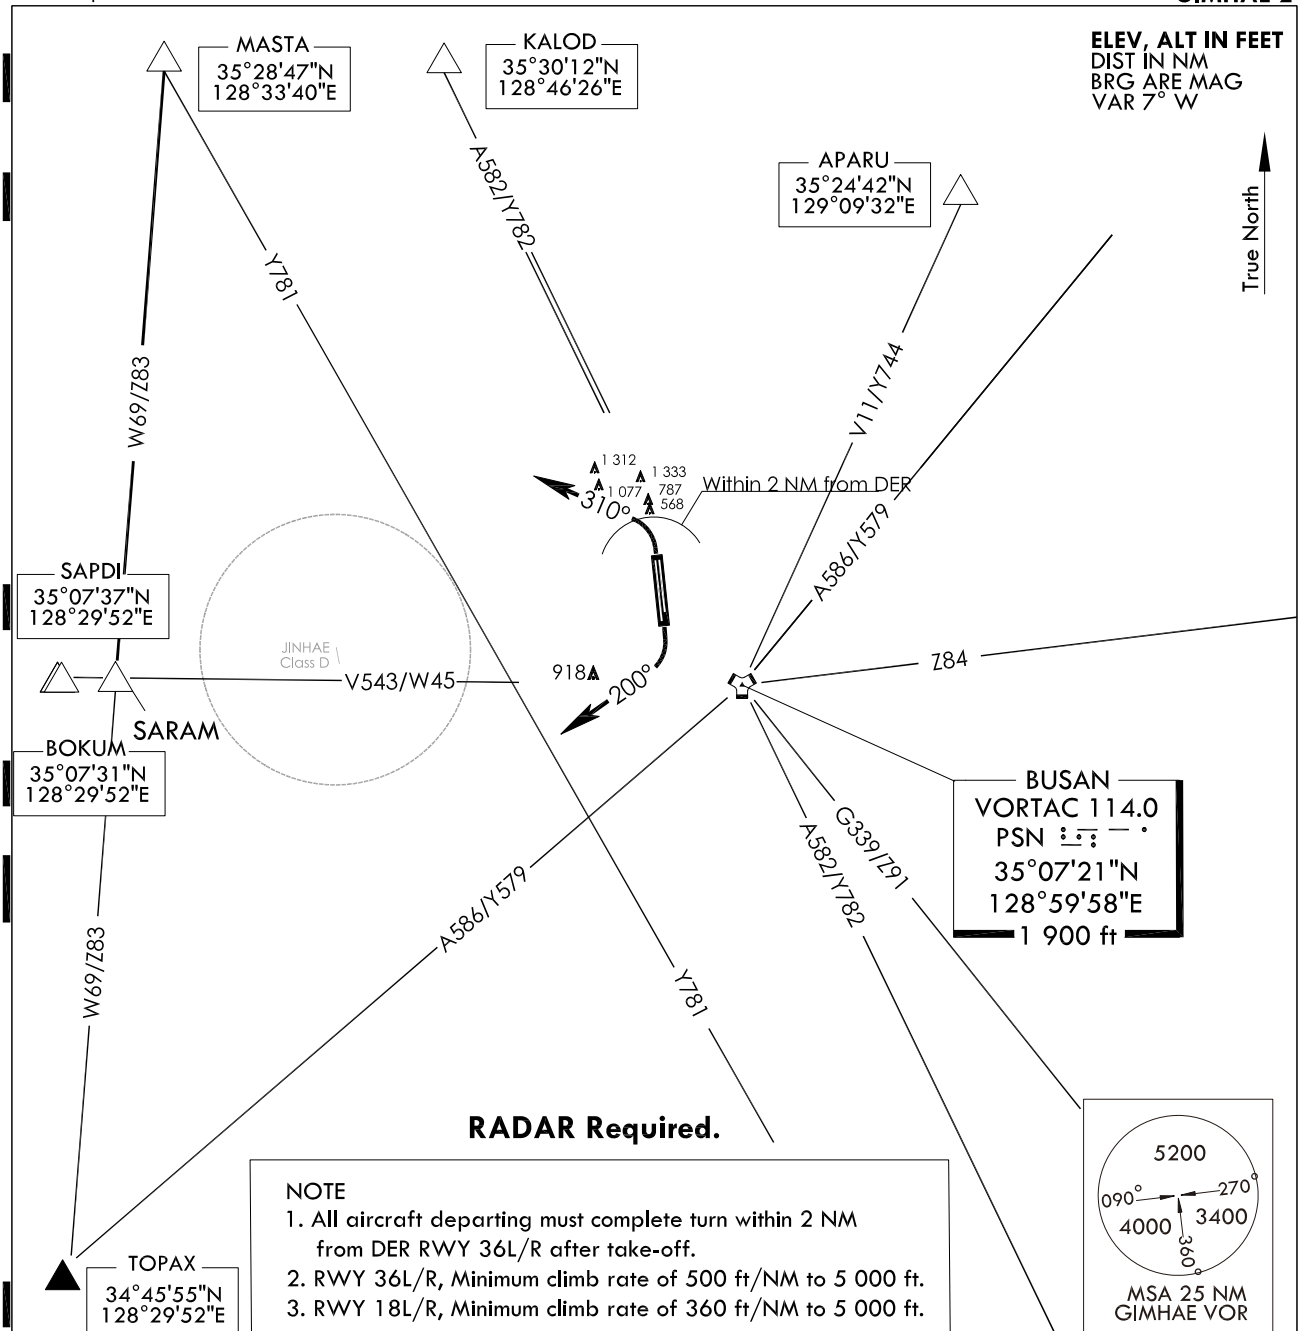

DEPARTURE ROUTE DESCRIPTION

GIMHAE 2 DEPARTURE

RWY 36L/R : Climb left turn HDG 310°, Thence.....

RWY 18L/R : Climb right turn HDG 200°, Thence.....

.....Expect radar vectors to intercept filed Enroute fix or Navaid.
Maintain 5 000 ft or assigned altitude (flight level).
Expect filed altitude/flight level 10 minutes after departure.

LOST COMMUNICATIONS : If radio contact is not established with departure control prior to reaching 5 000 ft, Continue climb to 8 000 ft before turning to filed fix/Navaid and proceed filed route and altitude.

INTENTIONALLY

LEFT

BLANK


**STANDARD DEPARTURE
CHART - INSTRUMENT(SID)**

TRANSITION ALT 14 000
TRANSITION LVL FL 140

GIMHAE DEP 125.5
363.8
GIMHAE TWR 118.1
118.450

BUSAN/Gimhae Intl(RKPK)
RWY 36L/R
GARAK 3

Note : Departure under U.S. TERPS.

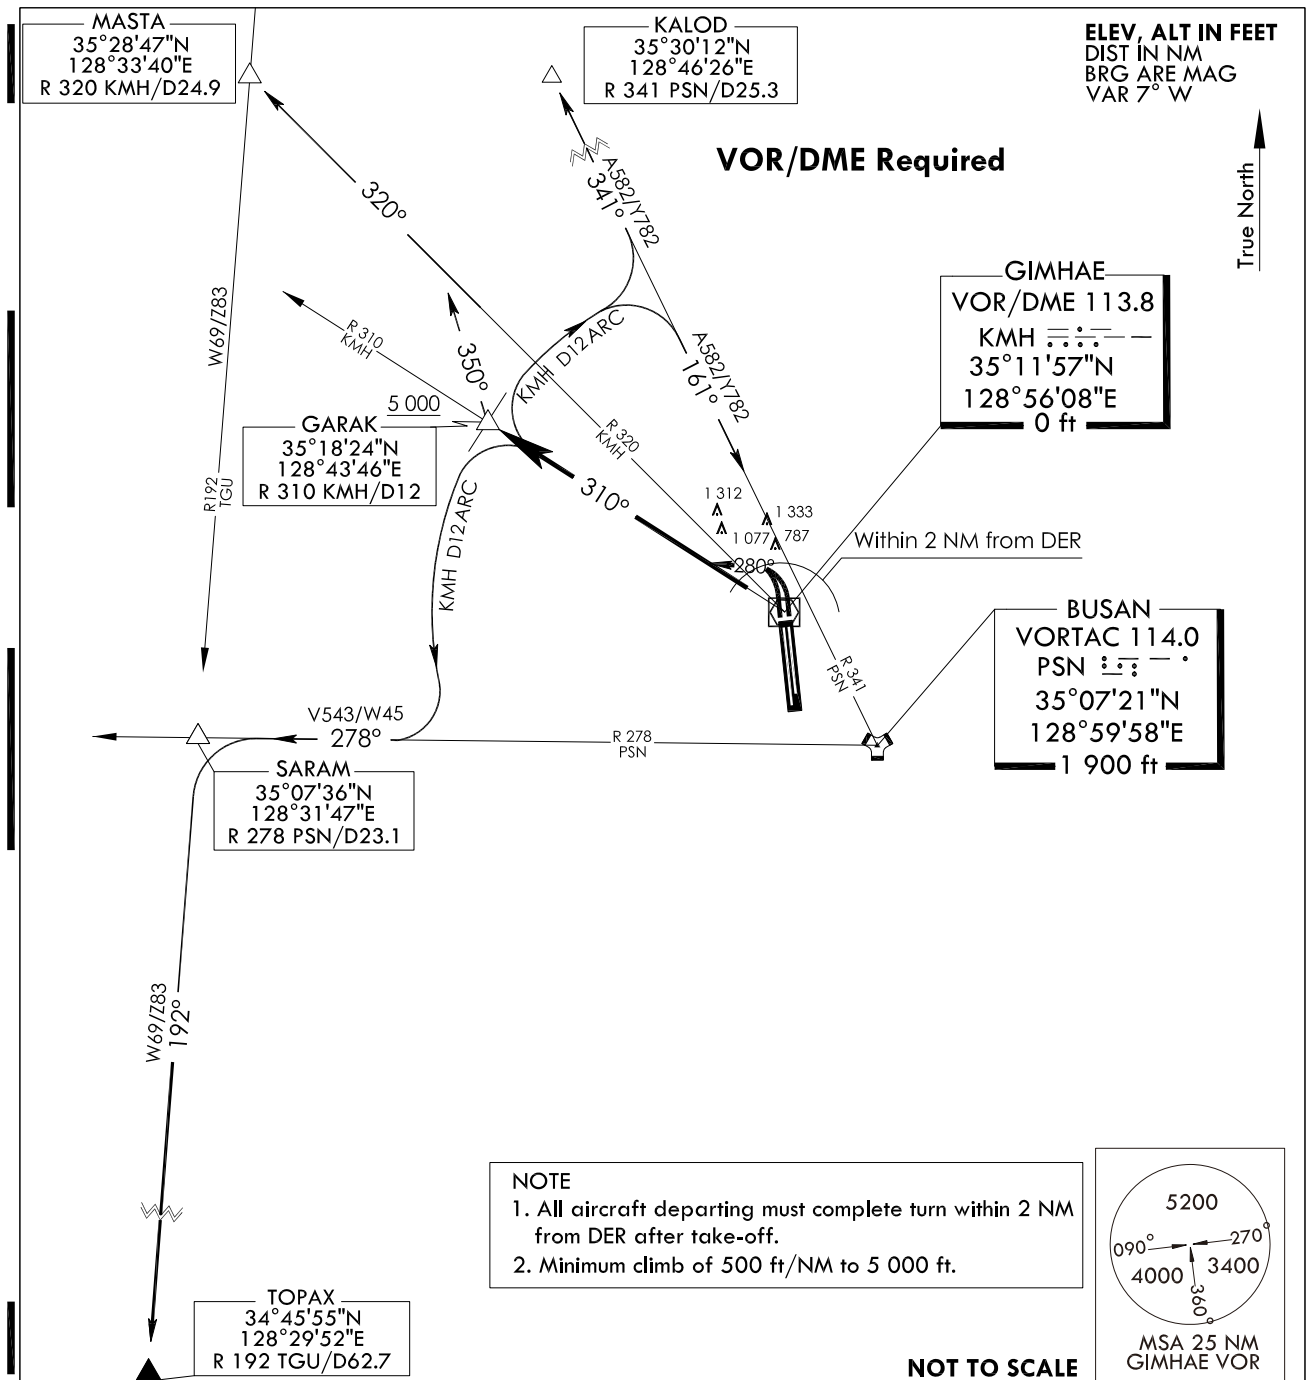

DEPARTURE ROUTE DESCRIPTION

GARAK 3 DEPARTURE

RUNWAY 36L/R : Climbing left turn HDG 280° to intercept R 310 KMH and R 310 KMH to cross GARAK at or above 5 000 ft. thence.....
.....via (TRANSITIONS), climb assigned altitude or as directed by ATC.

KALOD Transition : Right turn and proceed via KMH 12 DME arc to R 341 PSN, then via R 341 PSN to KALOD.

BUSAN(PSN) Transition : Right turn and proceed via KMH 12 DME arc to R 341 PSN, then via R 341 PSN to PSN.

MASTA Transition : Right turn HDG 350° to R 320 KMH , then via R 320 KMH to MASTA.

TOPAX Transition : Left turn and proceed via KMH 12 DME arc to R 278 PSN, then via R 278 PSN to SARAM, then left turn via R 192 TGU to TOPAX.

Change : Amended coordinate and radial format.

INTENTIONALLY

LEFT

BLANK


**STANDARD DEPARTURE
CHART - INSTRUMENT(SID)**

TRANSITION ALT 14 000
TRANSITION LVL FL 140

GIMHAE DEP 125.5
363.8
GIMHAE TWR 118.1
118.450

BUSAN/Gimhae Intl(RKPK)
RWY 36L/R
SOORO 1

Note : Departure under U.S. TERPS.

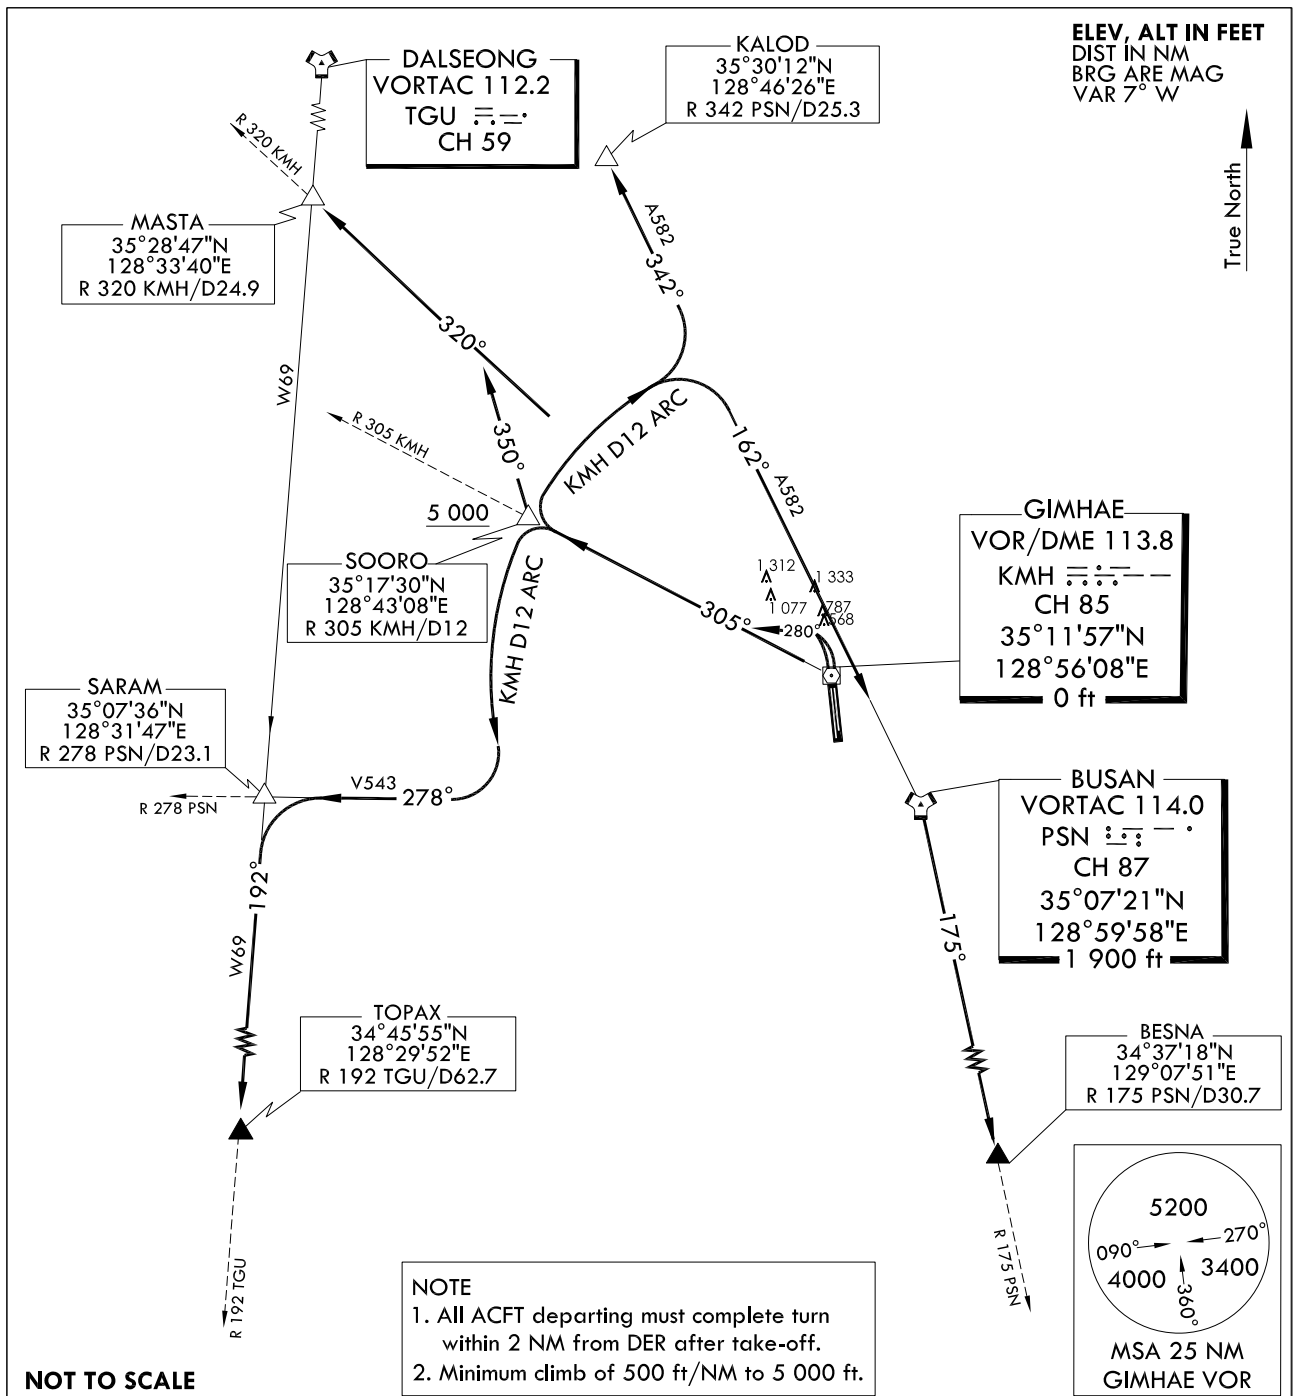

DEPARTURE ROUTE DESCRIPTION

SOORO 1 DEPARTURE

RUNWAY 36L/R : Climbing left turn as soon as practicable HDG 280° to intercept R 305 KMH and R 305 KMH to cross SOORO at or above 5 000 ft. thence.....
.....via (TRANSITIONS), climb assigned altitude or as directed by ATC.

KALOD Transition : Right turn and proceed via KMH 12 DME arc to R 342 PSN, then via R 342 PSN to KALOD.

BUSAN(PSN) Transition : Right turn and proceed via KMH 12 DME arc to R 342 PSN, then via R 342 PSN to PSN.

MASTA Transition : Right turn HDG 350° to R 320 KMH , then R 320 KMH to MASTA.

TOPAX Transition : Left turn and proceed via KMH 12 DME arc to R 278 PSN, then via R 278 PSN to SARAM, then left turn via R 192 TGU to TOPAX.

BESNA Transition : Right turn and proceed via KMH 12 DME arc to R 342 PSN, then via R 342 PSN to PSN, then via R 175 PSN to BESNA.

Change : Amended coordinate and radial format.

INTENTIONALLY

LEFT

BLANK

**STANDARD DEPARTURE
CHART - INSTRUMENT(SID)**

TRANSITION	ALT	14 000
TRANSITION	LVL	FL 140

GIMHAE DEP	125.5
	363.8
GIMHAE TWR	118.1
	118.450



BUSAN/Gimhae Intl(RKPK)
RWY 36L/R
LEEMA 2

Note : Departure under U.S. TERPS.

ELEV, ALT IN FEET
DIST IN NM
BRG ARE MAG
VAR 7° W

True North

VOR/DME and RADAR Required.

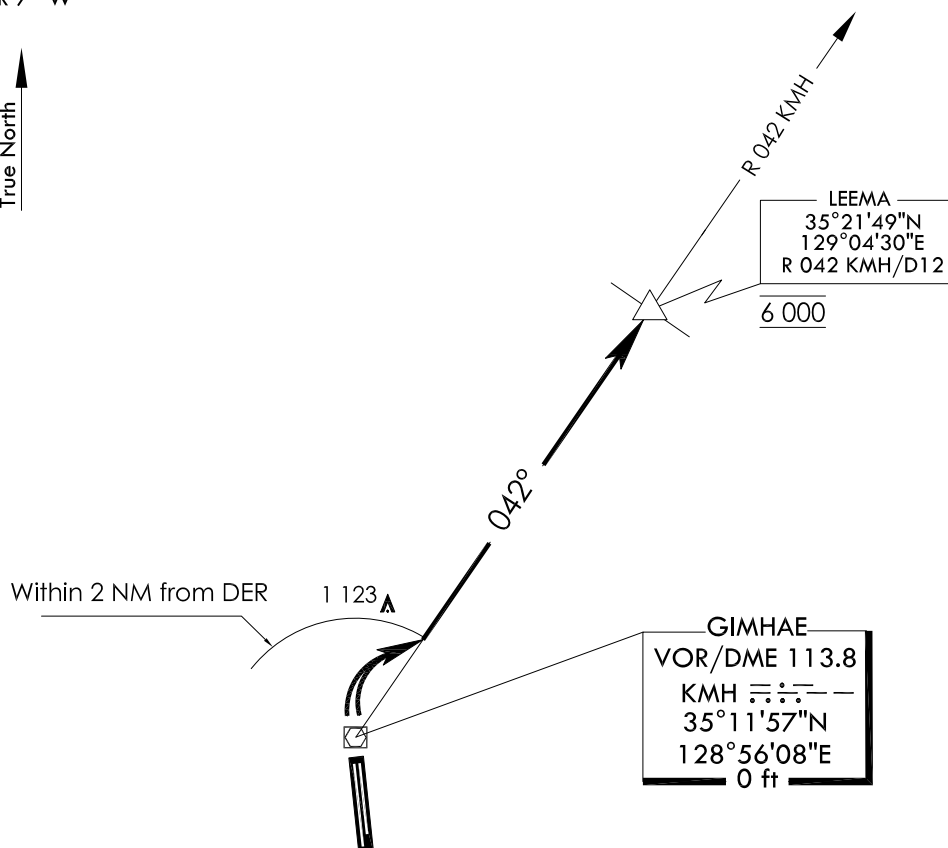

NOTE

1. All aircraft departing must complete turn within 2 NM from DER after take-off.
2. Do not exceed 240 kt IAS below 6 000 ft.
3. Minimum climb of 500 ft/NM to 6 000 ft.

NOT TO SCALE

DEPARTURE PROCEDURE DESCRIPTION

LEEMA 2 DEPARTURE

RUNWAY 36L/R : Climbing right turn to intercept R 042 KMH
and climb to 6 000 ft on R 042 KMH to LEEMA,
then expect RADAR vector to assigned route and fix.

Change : Amended coordinate and radial format.

INTENTIONALLY

LEFT

BLANK


**STANDARD DEPARTURE
CHART - INSTRUMENT(SID)**

TRANSITION ALT 14 000
TRANSITION LVL FL 140

GIMHAE DEP 125.5
363.8
GIMHAE TWR 118.1
118.450

BUSAN/Gimhae Intl(RKPK)
RWY 18L/R
RNAV(GNSS) BURIM 2

Note : Departure under U.S. TERPS.

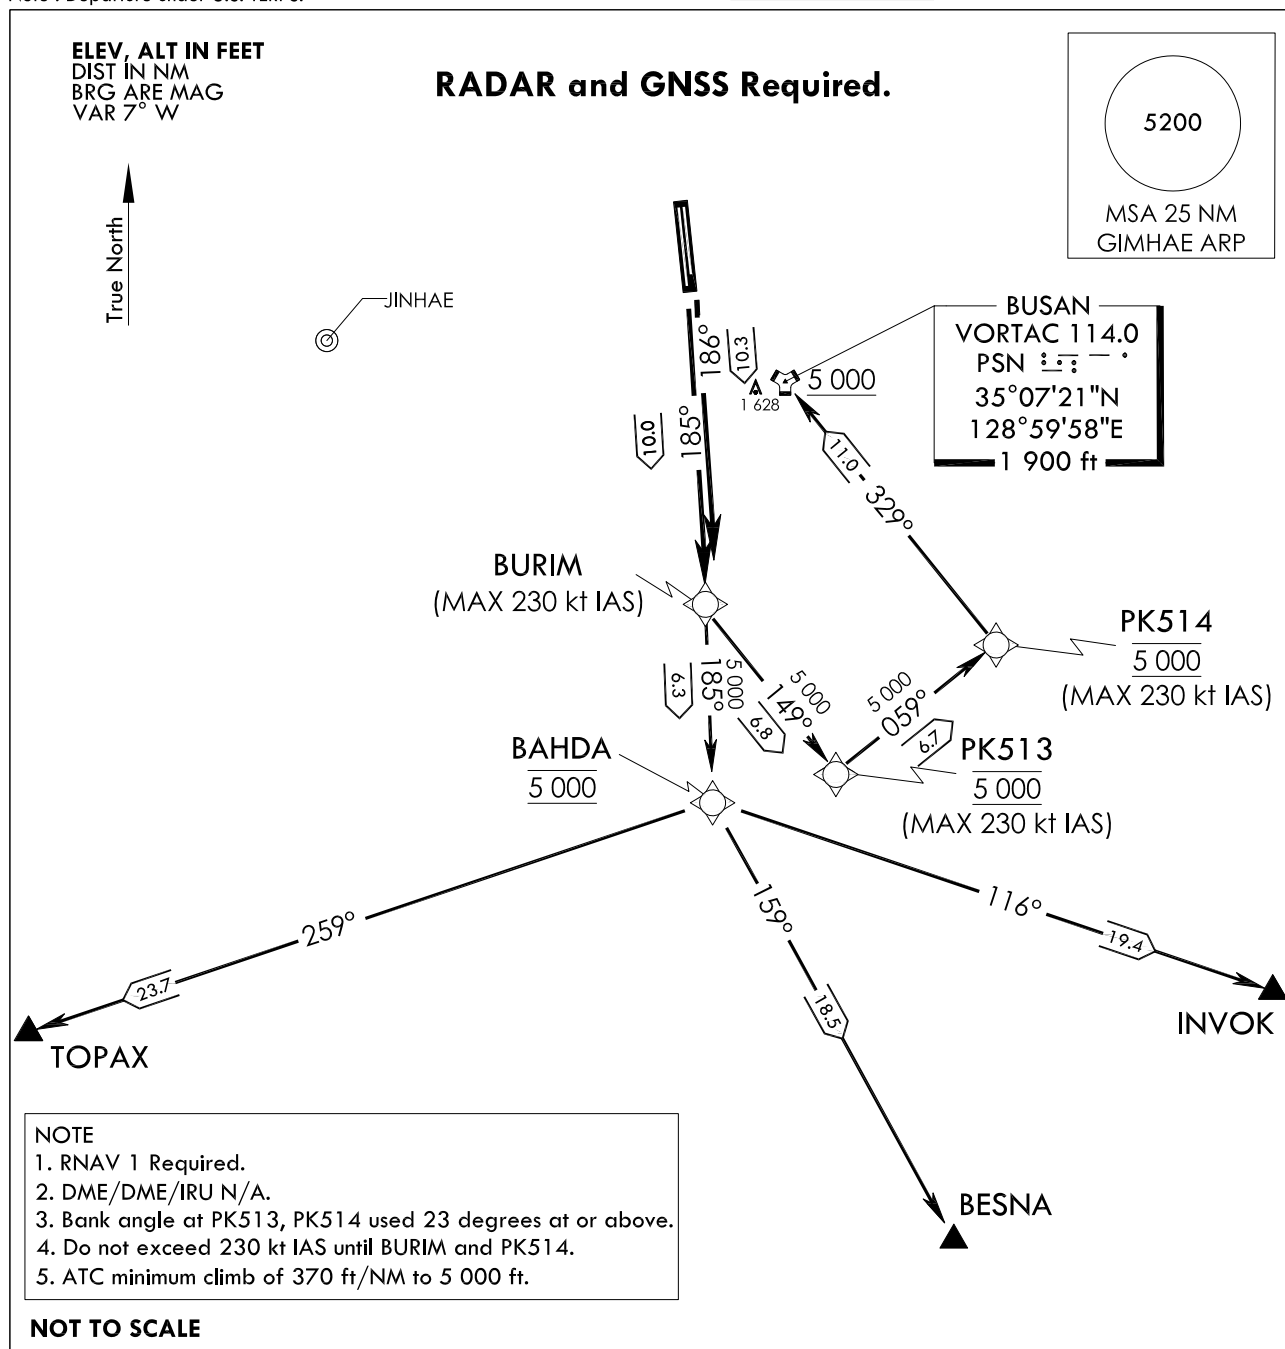

DEPARTURE ROUTE DESCRIPTION

BURIM 2 DEPARTURE

RUNWAY 18R : Climb on course 185° to BURIM, thence.....

RUNWAY 18L : Climb on course 186° to BURIM, thence.....

..... via (TRANSITIONS routes) and climb assigned altitude by ATC.

TOPAX transition : From BURIM on track 185° to cross BAHDA at 5 000 ft, then track 259° to TOPAX.

BESNA transition : From BURIM on track 185° to cross BAHDA at 5 000 ft, then track 159° to BESNA.

INVOK transition : From BURIM on track 185° to cross BAHDA at 5 000 ft, then track 116° to INVOK.

BUSAN (PSN) transition : From BURIM on track 149° to cross PK513 at 5 000 ft,
then track 059° to cross PK514 at 5 000 ft,
then track 329° to cross BUSAN(PSN) at or above 5 000 ft.

Change : Amended coordinate format.

BUSAN/Gimhae INTL(RKPK)
RWY 18L/R
RNAV(GNSS) BURIM 2

AERONAUTICAL DATA TABULATION

Standard Instrument Departure Procedure Coding Tables

Departure Route - RWY 18L

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	-	RWY 36R	-	-	-	-	-	-	35°10'10.10"N 128°56'26.14"E	-	RNAV 1	DER
002	CF	BURIM	-	185.79(178.33)	10.29	-	-	-230	34°59'52.3"N 128°56'48.1"E	-	RNAV 1	CG 370 ft /NM to 5 000 ft

Departure Route - RWY 18R

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	-	RWY 36L	-	-	-	-	-	-	35°09'54.69"N 128°56'19.79"E	-	RNAV 1	DER
002	CF	BURIM	-	185.25(177.79)	10.03	-	-	-230	34°59'52.3"N 128°56'48.1"E	-	RNAV 1	CG 370 ft /NM to 5 000 ft

RNAV BURIM 2 - TOPAX Transition

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	TF	BAHDA	-	185.24(177.77)	6.27	-	@5 000	-	34°53'34.4"N 128°57'05.8"E	-	RNAV 1	CG 370 ft /NM to 5 000 ft
002	TF	TOPAX	-	258.78(251.31)	23.69	-	+5 000	-	34°45'55.3"N 128°29'51.7"E	-	RNAV 1	-

RNAV BURIM 2 - BESNA Transition

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	TF	BAHDA	-	185.24(177.77)	6.27	-	@5 000	-	34°53'34.4"N 128°57'05.8"E	-	RNAV 1	CG 370 ft /NM to 5 000 ft
002	TF	BESNA	-	158.81(151.34)	18.51	-	+5 000	-	34°37'18.0"N 129°07'51.0"E	-	RNAV 1	-

RNAV BURIM 2 - INVOK Transition

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	TF	BAHDA	-	185.24(177.77)	6.27	-	@5 000	-	34°53'34.4"N 128°57'05.8"E	-	RNAV 1	CG 370 ft /NM to 5 000 ft
002	TF	INVOK	-	116.21(108.75)	19.38	-	+5 000	-	34°47'19.0"N 129°19'23.0"E	-	RNAV 1	-

RNAV BURIM 2 - PSN(VORTAC) Transition

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ TCH	Navigation specification	Remarks
001	TF	PK513	-	148.71(141.24)	6.83	-	@5 000	-230	34°54'32.3"N 129°01'59.8"E	-	RNAV 1	CG 370 ft /NM to 5 000 ft
002	TF	PK514	-	058.76(051.29)	6.71	-	@5 000	-230	34°58'44.3"N 129°08'22.2"E	-	RNAV 1	-
003	TF	PSN	-	328.82(321.35)	11.03	-	+5 000	-	35°07'21.5"N 128°59'58.5"E	-	RNAV 1	VORTAC

Change : Amended coordinate format.


**STANDARD DEPARTURE
CHART - INSTRUMENT(SID)**

TRANSITION ALT 14 000
TRANSITION LVL FL 140

GIMHAE DEP 125.5
363.8
GIMHAE TWR 118.1
118.450

BUSAN/Gimhae Intl(RKPK)
RWY 18L/R
ULSUK 3

Note : Departure under U.S. TERPS.

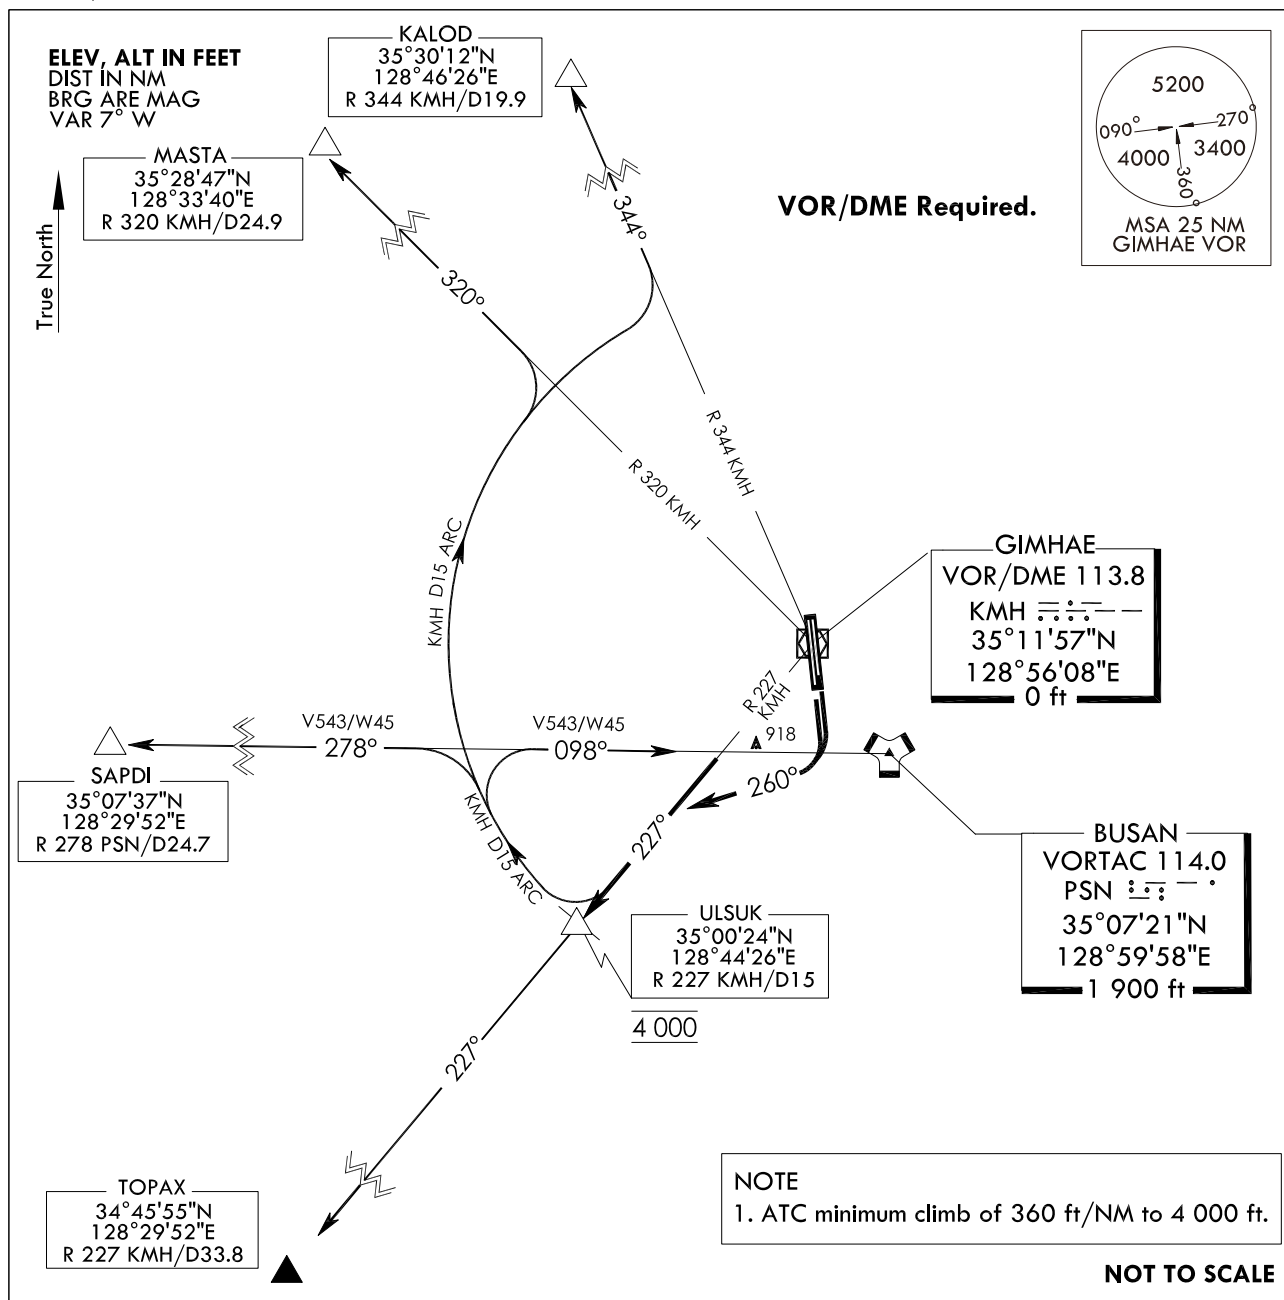

DEPARTURE PROCEDURE DESCRIPTION

ULSUK 3 DEPARTURE

RUNWAY 18L/R : Climbing right turn HDG 260° to intercept R 227 KM/D15 and climbing 4 000 ft on R 227 KM/D15 to ULSUK, thence.....
.....via (TRANSITION), climb assigned altitude or as directed by ATC.

KALOD transition : Right turn and proceed via KM/D15 arc to R 344 KM/D19.9, then via R 344 KM/D19.9 to KALOD.

MASTA transition : Right turn and proceed via KM/D15 arc to R 320 KM/D24.9, then via R 320 KM/D24.9 to MASTA.

SAPDI transition : Right turn and proceed via KM/D15 arc to R 278 PSN, then via R 278 PSN to SAPDI.

BUSAN (PSN) transition : Right turn and proceed via KM/D15 arc to R 278 PSN, then via R 278 PSN to BUSAN (PSN).

TOPAX transition : R 227 KM/D33.8 to TOPAX.

Change : Amended coordinate and radial format.

INTENTIONALLY

LEFT

BLANK


STANDARD DEPARTURE CHART
INSTRUMENT (SID)

TRANSITION ALT 14 000
TRANSITION LVL FL 140

GIMHAE DEP 125.5 363.8
GIMHAE TWR 118.1 233.3
118.450 236.6

BUSAN/Gimhae INTL(RKPK)
RWY 18L/R
BAHDA 1

Note : Departure under U.S TERPS.

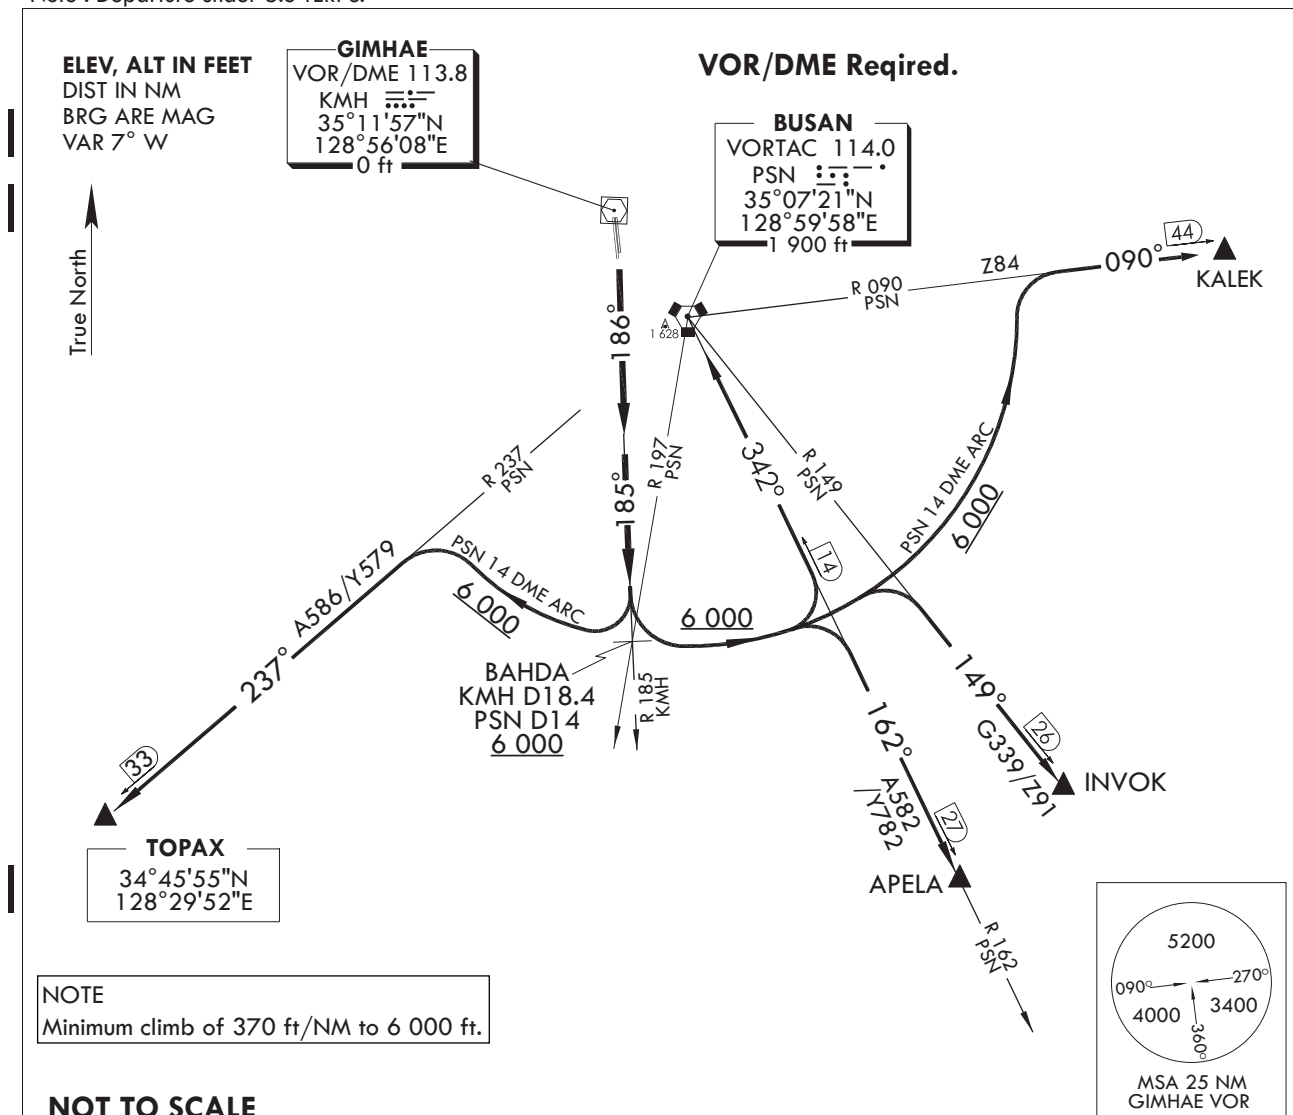

DEPARTURE ROUTE DESCRIPTION

BAHDA 1 DEPARTURE

RUNWAY 18L/R : Climb 6 000 ft via HDG 186° to intercept R 185 KMH to cross BAHDA at or above 6 000 ft, then via(TRANSITION routes) and climb assigned altitude by ATC.

KALEK transition : Left turn and proceed via the PSN D14 ARC to intercept R 090 PSN then R 090 PSN to KALEK.

INVOK transition : Left turn and proceed via the PSN D14 ARC to intercept R 149 PSN then R 149 PSN to INVOK.

APELA transition : Left turn and proceed via the PSN D14 ARC to intercept R 162 PSN then R 162 PSN to APELA.

BUSAN(VORTAC) transition : Left turn and proceed via the PSN D14 ARC to intercept R 162 PSN then R 162 PSN to BUSAN VORTAC(PSN).

TOPAX transition : Right turn and proceed via the PSN D14 ARC to intercept R 237 PSN then R 237 PSN to TOPAX.

Change : Amended coordinate format.

INTENTIONALLY

LEFT

BLANK