


**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 119 ft
HEIGHTS RELATED TO
THR RWY 07 - ELEV 87 ft

JEJU APP 121.2
124.05
JEJU TWR 118.2
118.55

JEJU/Jeju Intl(RKPC)
ILS Z or LOC Z RWY 07
CAT II

Note : Approach under ICAO Flight Procedures.

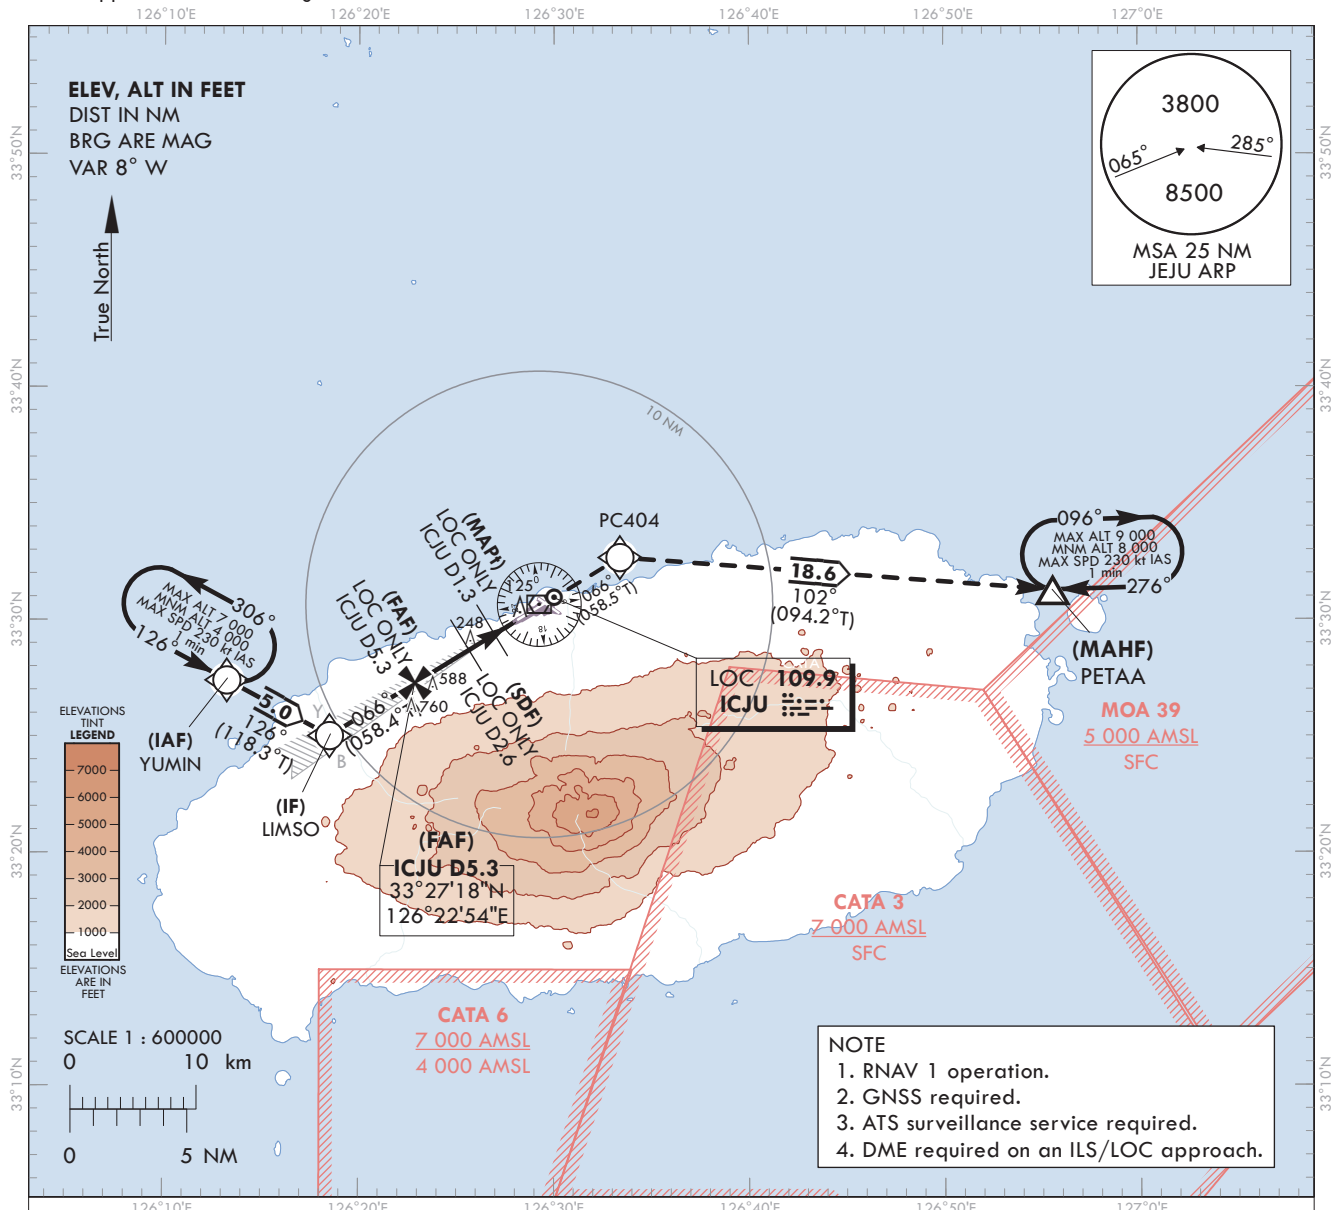


RECOMMENDED PROFILE (LOC ONLY)	DME ICJU	5	4	3	2
Final Approach Gradient 5.33%, 324 ft/NM	ALT(HGT)	1 702 (1 615)	1 379 (1 292)	1 055 (968)	731 (644)

MISSED APPROACH

Climb to 8 000 ft on track of 066° to PC404, then RIGHT turn on track of 102° to PETAA and Hold.

TRANSITION ALT 14 000
TRANSITION LVL FL 140

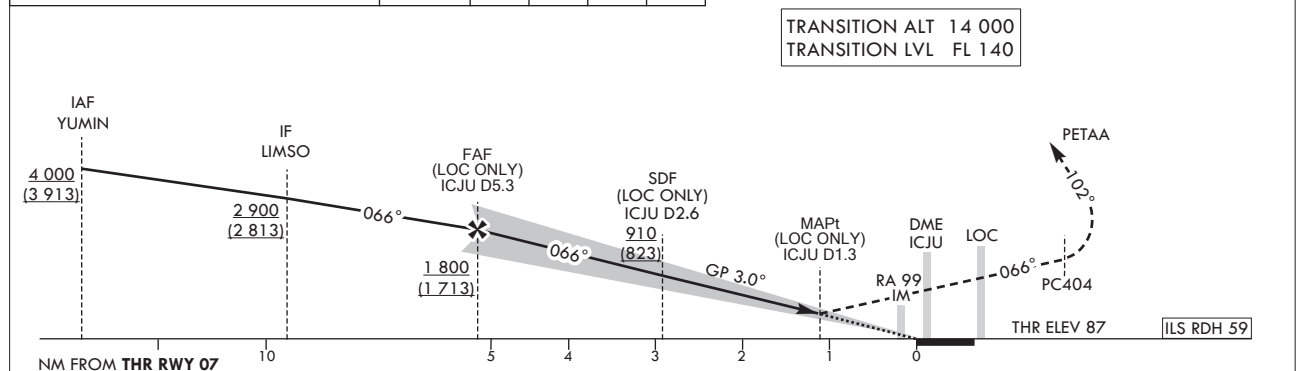

OCA (H)		A	B	C	D	DL		Knots	60	90	120	150	180	
Straight-in Approach	CAT-I	287 (200)					Rate of descent	V/V fpm	318	478	637	796	955	
	LOC	530 (443)						* Timing Not authorized for defining MAPt. * Circling Not authorized.						
	CAT-II	187 (100)												

Change : Establishment of instrument approach procedures(ILS Z or LOC Z for RWY 07).

JEJU/Jeju Intl(RKPC)
ILS Z or LOC Z RWY 07
CAT II

AERONAUTICAL DATA TABULATION

ILS Z or LOC Z Approach to RWY 07 from YUMIN(IAF)		
Fix/point		Coordinates
YUMIN(IAF)		33°27'25.7"N 126°13'15.5"E
LIMSO(IF)		33°25'03.0"N 126°18'31.0"E
D5.3 ICJU(FAF LOC only)	BRG 66.15°/5.31 NM ICJU	33°27'18.5"N 126°22'53.6"E
D2.6 ICJU(SDF LOC only)	BRG 66.17°/2.60 NM ICJU	33°28'43.8"N 126°25'39.3"E
D1.3 ICJU(MAPt LOC only)	BRG 66.19°/1.30 NM ICJU	33°29'24.8"N 126°26'58.8"E
THR RWY 07		33°29'59.57"N 126°28'06.50"E
DME ICJU		33°30'09.0"N 126°28'15.7"E
PC404		33°32'42.3"N 126°33'23.4"E
PETAA(MAHF)		33°31'18.0"N 126°55'34.0"E


Change : Establishment of instrument approach procedures(ILS Z or LOC Z for RWY 07).

AERODROME ELEV 119 ft
HEIGHTS RELATED TO
THR RWY 07 - ELEV **87 ft**

JEJU	APP	121.2
		124.05
JEJU	TWR	118.2
		118.55

JEJU/Jeju Intl(RKPC)
ILS Y or LOC Y RWY 07
CAT II


Note : Approach under ICAO Flight Procedures.

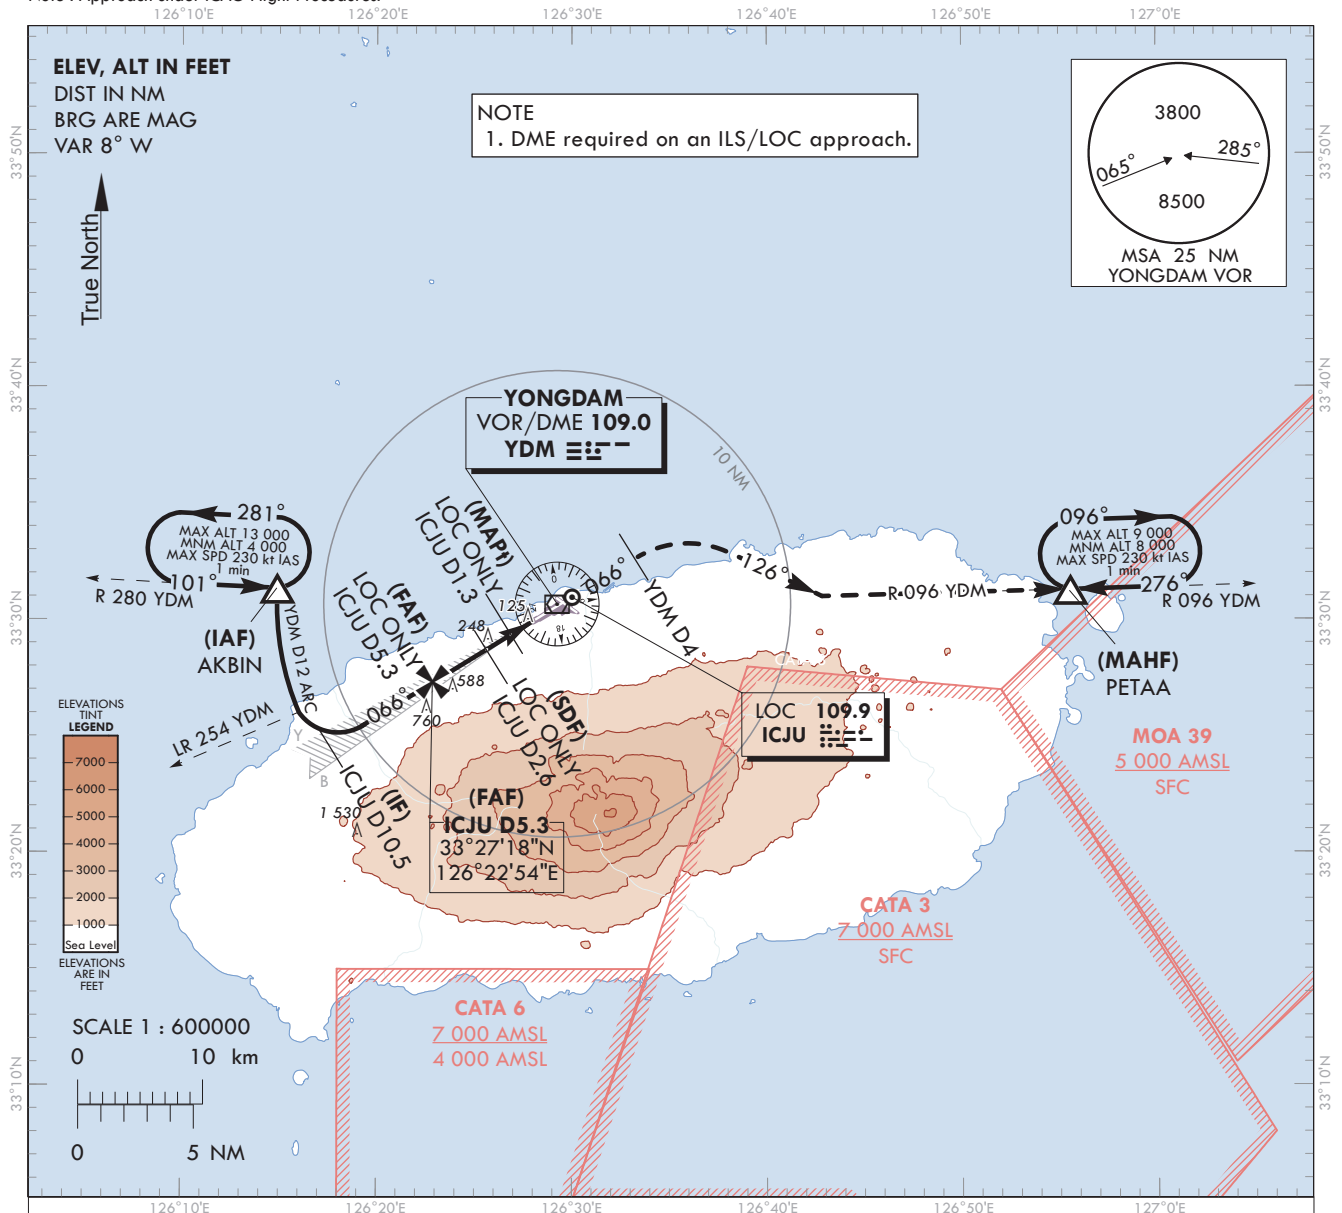

RECOMMENDED PROFILE (LOC ONLY)	DME ICJU	5	4	3	2
Final Approach Gradient 5.33%, 324 ft/NM	ALT(HGT)	1 702 (1 615)	1 379 (1 292)	1 055 (968)	731 (644)

Climb straight ahead until YDM D4 then RIGHT turn to Intercept R 096 YDM to PETAA and Hold at 8 000 ft.

TRANSITION ALT	14 000
TRANSITION LVL	FL 140

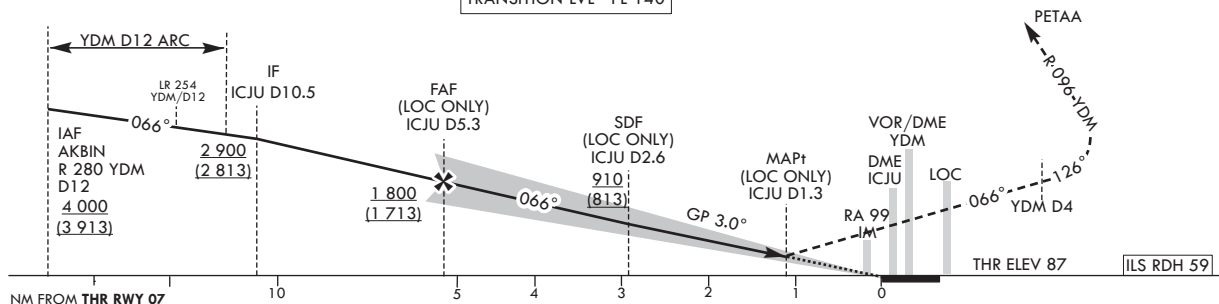

OCA (H)		A	B	C	D	DL		Knots	60	90	120	150	180	
Straight-in Approach	CAT-I	287 (200)					Rate of descent	V/V fpm	318	478	637	796	955	
	LOC	530 (443)						* Timing Not authorized for defining MAPt. * Circling Not authorized.						
	CAT-II	187 (100)												

Change : Establishment of instrument approach procedures(ILS Y or LOC Y for RWY 07).

JEJU/Jeju Intl(RKPC)
ILS Y or LOC Y RWY 07
CAT II

AERONAUTICAL DATA TABULATION

ILS Y or LOC Y Approach to RWY 07 from AKBIN(IAF)		
Fix/point		Coordinates
AKBIN(IAF)	12 DME ARC /12.00 NM YDM	33°31'21.5"N 126°14'55.3"E
D10.5 ICJU(IF)	BRG 66.10°/10.50 NM ICJU	33°24'35.0"N 126°17'36.8"E
D5.3 ICJU(FAF LOC only)	BRG 66.15°/5.31 NM ICJU	33°27'18.5"N 126°22'53.6"E
D2.6 ICJU(SDF LOC only)	BRG 66.17°/2.60 NM ICJU	33°28'43.8"N 126°25'39.3"E
D1.3 ICJU(MAPt LOC only)	BRG 66.19°/1.30 NM ICJU	33°29'24.8"N 126°26'58.8"E
THR RWY 07		33°29'59.57"N 126°28'06.50"E
DME ICJU		33°30'09.0"N 126°28'15.7"E
YDM VOR/DME		33°30'41.3"N 126°29'15.3"E
D4.0 YDM	BRG 66.20°/4.00 NM YDM	33°32'42.4"N 126°33'23.4"E
PETAA	BRG 96.03°/22.00 NM YDM	33°31'18.0"N 126°55'34.0"E


Change : Establishment of instrument approach procedures(ILS Y or LOC Y for RWY 07).

INSTRUMENT
APPROACH
CHART - ICAOAERODROME ELEV 119 ft
HEIGHTS RELATED TO
THR RWY 07 - ELEV 87 ftJEJU APP 121.2
124.05
JEJU TWR 118.2
118.55

JEJU/Jeju Intl(RKPC)


RNP Z RWY 07(AR)

Note : Approach under ICAO Flight Procedures.

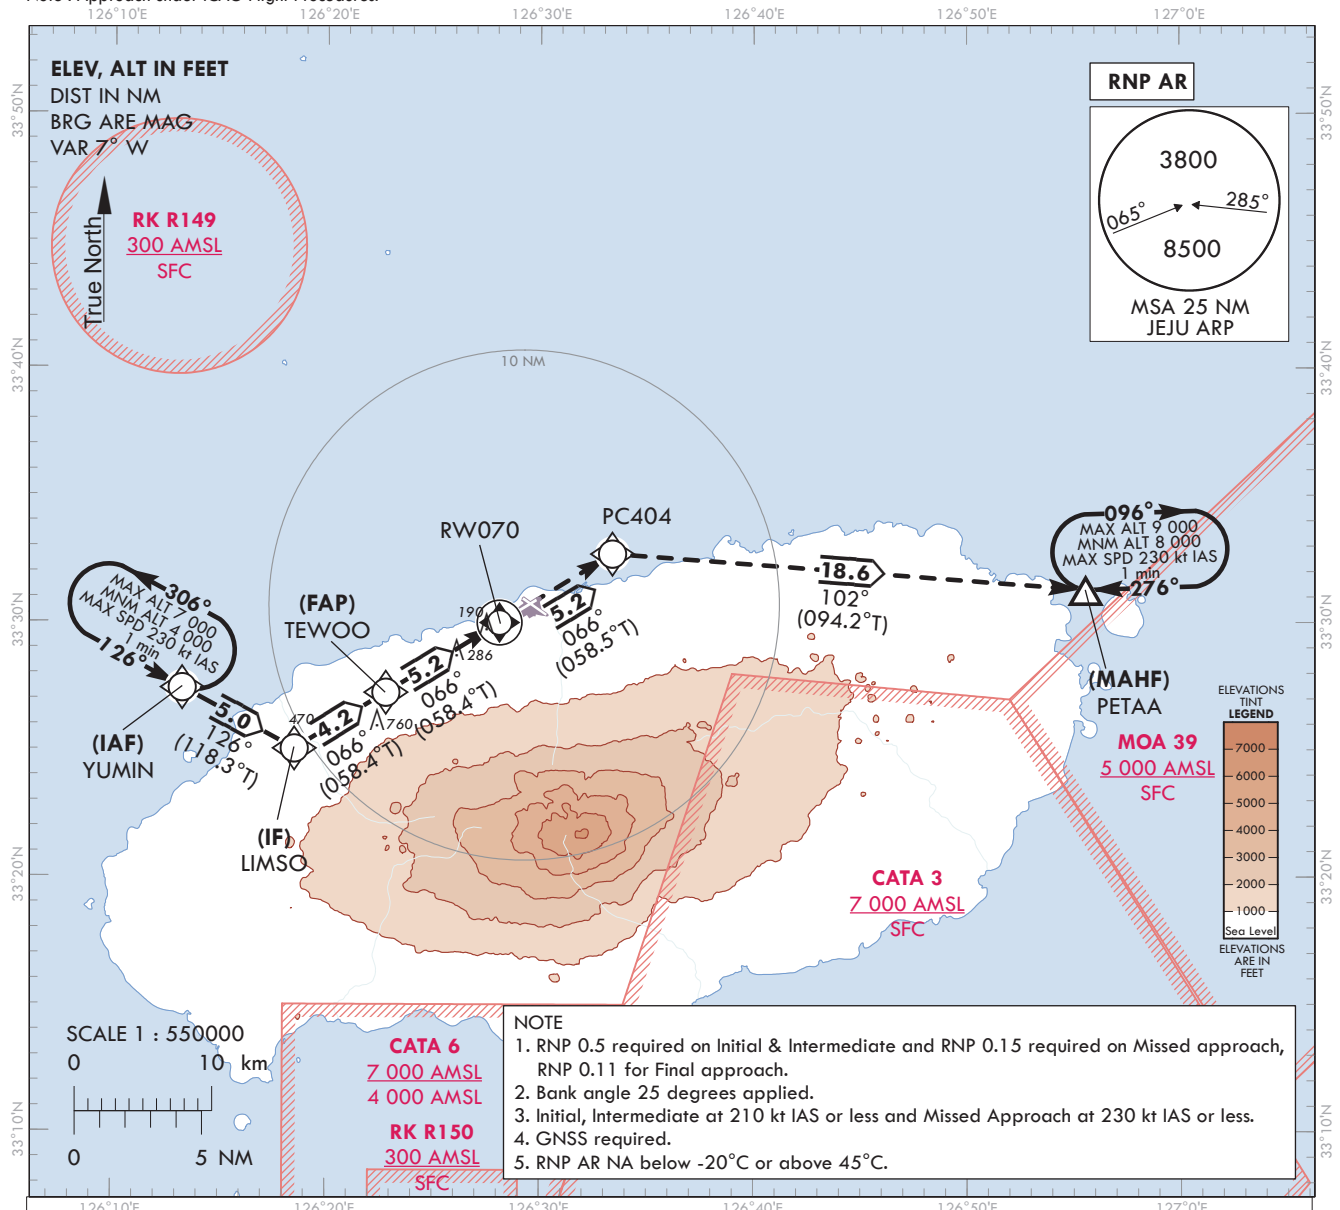TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH

Climb to 8 000 ft on track of 066° to PC404, then RIGHT turn on track of 102° to PETAA.

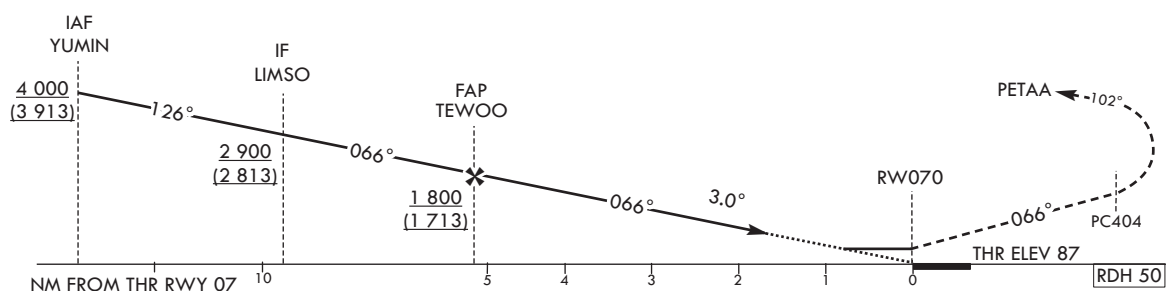

						Knots	60	90	120	150	180	
OCA (H)		A	B	C	D	Rate of descent	V/V fpm	319	478	637	796	956
Straight-in Approach	RNP 0.11	360 (273)					* Timing Not authorized for defining MAPt. * Circling Not authorized.					

Change : Information of landing minima(OCA(H)).

JEJU/Jeju Intl(RKPC)
RNP Z RWY 07(AR)

AERONAUTICAL DATA TABULATION

Instrument Approach Procedure Coding Tables

RNP Z RWY 07(AR)

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	YUMIN	-	-	-	-	+4 000	-210	33°27'25.7"N 126°13'15.5"E	-	RNP 0.5	IAF
002	TF	LMSO	-	126(118.3)	5.0	-	+2 900	-210	33°25'03.0"N 126°18'31.0"E	-	RNP 0.5	IF
003	TF	TEWOO	-	066(058.4)	4.2	-	+1 800	-	33°27'15.3"N 126°22'47.5"E	-	RNP 0.11	FAP
004	TF	RW070	Y	066(058.4)	5.2	-	-	-	33°29'59.57"N 126°28'06.50"E	-3.00/50	RNP 0.11	Bank angle 25°
005	TF	PC404	-	066(058.5)	5.2	-	-	-	33°32'42.3"N 126°33'23.4"E	-	RNP 0.15	Bank angle 25°
006	TF	PETAA	Y	102(094.2)	18.6	-	-	-	33°31'18.0"N 126°55'34.0"E	-	RNP 0.15	-
007	HM	PETAA	Y	276(268.2)	-	R	-9 000 +8 000	-230	33°31'18.0"N 126°55'34.0"E	-	RNP 0.15	1 min (Outbound timing)

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Time (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNP Z RWY 07	HM	YUMIN	Y	126(118.3)	1.0	L	-7 000 +4 000	-230	33°27'25.7"N 126°13'15.5"E	-	RNP 0.5	-

**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 119 ft
HEIGHTS RELATED TO
THR RWY 07 - ELEV 87 ft


JEJU APP 121.2
JEJU TWR 124.05
118.2
118.55

KASS
CH60369
K07A
RDH : 50

JEJU/Jeju Intl(RKPC)

RNP Y RWY 07


Note : Approach under ICAO Flight Procedures.

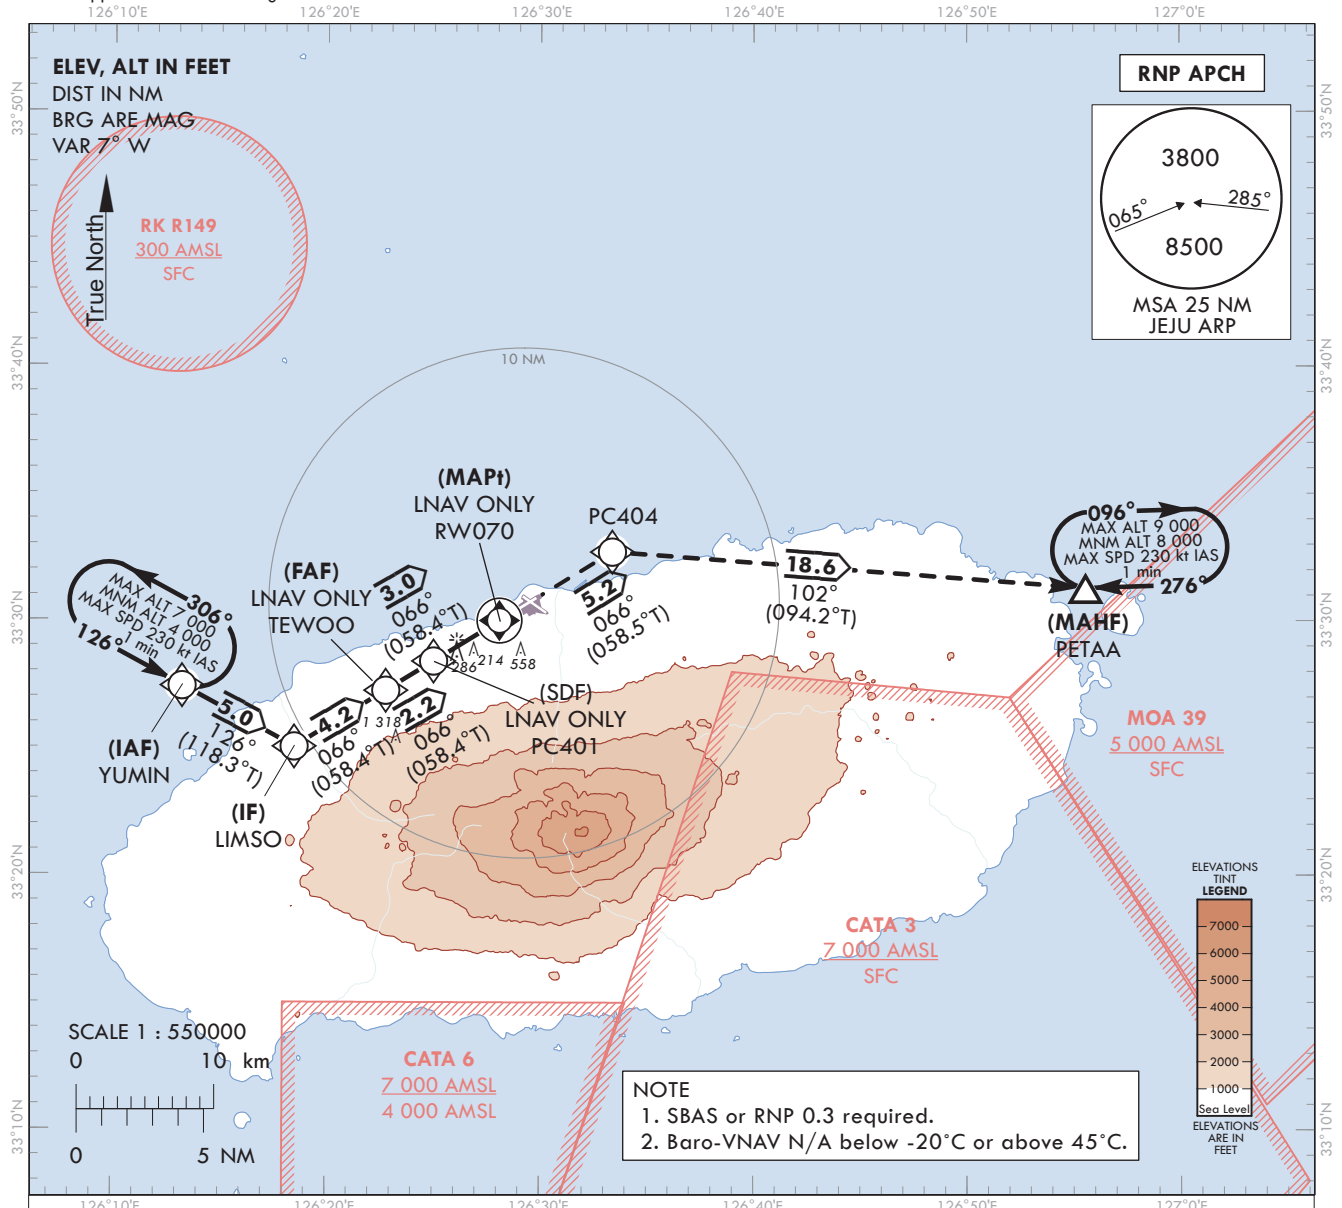

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH

Climb to 8 000 ft on track of 066° to PC404, then RIGHT turn on track of 102° to PETAA and Hold at 8 000 ft.

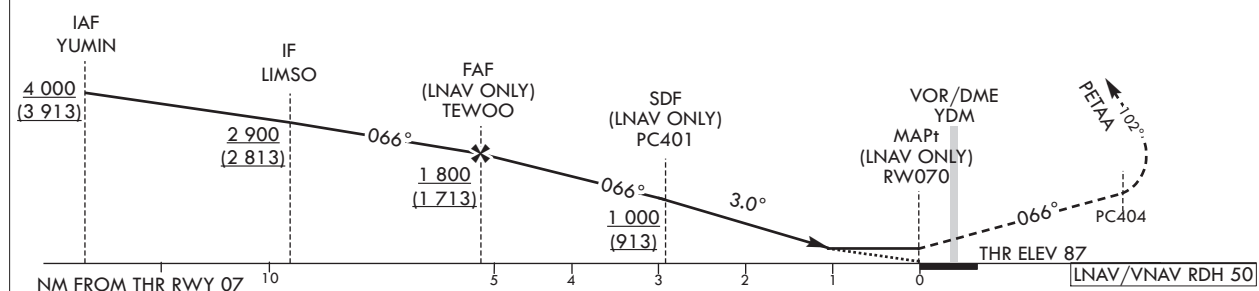

OCA (H)		A	B	C	D
Straight-in Approach	LPV	430 (343)			
	LNAV/VNAV	560 (473)			
	LNAV	640 (553)			

		Knots	60	90	120	150	180
Rate of descent	V/V fpm	318	478	637	796	955	

* Timing Not authorized for defining MAPt.
* Circling Not authorized.

Change : Information of KASS identification(CH52013 → CH60369).

JEJU/Jeju Intl(RKPC)
RNP Y RWY 07

AERONAUTICAL DATA TABULATION

Instrument Approach Procedure Coding Tables

RNP Y RWY 07

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	YUMIN	-	-	-	-	+4 000	-	33°27'25.7"N 126°13'15.5"E	-	RNP APCH	IAF
002	TF	LMSO	-	126(118.3)	5.0	-	+2 900	-	33°25'03.0"N 126°18'31.0"E	-	RNP APCH	IF
003	TF	TEWOO	-	066(058.4)	4.2	-	+1 800	-	33°27'15.3"N 126°22'47.5"E	-	RNP APCH	FAF
004	TF	PC401	-	066(058.4)	2.2	-	+1 000	-	33°28'24.5"N 126°25'01.8"E	-	RNP APCH	SDF
005	TF	RW070	Y	066(058.4)	3.0	-	+640	-	33°29'59.6"N 126°28'06.5"E	-3.00/50	RNP APCH	MAPt
006	TF	PC404	-	066(058.5)	5.2	-	-	-	33°32'42.3"N 126°33'23.4"E	-	RNP APCH	-
007	TF	PETAA	Y	102(094.2)	18.6	-	-	-	33°31'18.0"N 126°55'34.0"E	-	RNP APCH	-
008	HM	PETAA	Y	276(268.2)	-	R	-9 000 +8 000	-230	33°31'18.0"N 126°55'34.0"E	-	RNP APCH	1 min (Outbound timing)

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(T)	Time (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
RNP Y RWY 07	HM	YUMIN	Y	126(118.3)	1.0	L	-7 000 +4 000	-230	33°27'25.7"N 126°13'15.5"E	-	RNAV 1	-

JEJU/Jeju Intl(RKPC)
RNP Y RWY 07

FAS DATA BLOCK INFORMATION

INPUT DATA

Parameters	Values
Operation Type	0
SBAS Provider Identifier	6 (KASS)
Airport Identifier	RKPC
Runway Number	07
Runway Letter	0 (None)
Approach Performance Designator	0
Route Indicator	Y
Reference Path Data Selector	0
Reference Path Identifier	K07A
LTP/FTP Latitude	33°29'59.5750"N
LTP/FTP Longitude	126°28'06.4995"E
LTP/FTP Height above ellipsoid (meters)	51.8
FPAP Latitude	33°30'53.5555"N
Delta FPAP Latitude (seconds)	53.9805
FPAP Longitude	126°29'51.5130"E
Delta FPAP Longitude (seconds)	105.0135
Approach Threshold Crossing Height (TCH)	50.0
Approach TCH Units Selector	0 (Feet)
Glidepath Angle (GPA)	3.00
Course Width at Threshold	105.00
Length Offset	0
Horizontal Alert Limit (HAL)	40.0
Vertical Alert Limit (VAL)	50.0

OUTPUT DATA

Data Block	60 03 10 0B 12 07 00 00 01 37 30 0B 2E 68 60 0E C7 3D 46 36 06 16 B9 A5 01 6B 34 03 F4 01 2C 01 64 00 C8 FA 11 46 E3 B9
Calculated CRC Value	1146E3B9

Change : Information of route indicator, data block and caculated CRC value.

INTENTIONALLY

LEFT

BLANK

VOR RWY 07

126°10'E 126°20'E 126°30'E 126°40'E 126°50'E 127°0'E



* Timing Not authorized for defining MAPt.
* Circling Not authorized.

AIRAC AIP AMDT 9/24
Effective : 1600UTC 30 OCT 2024

JEJU/Intl(RKPC)
VOR RWY 07

AERONAUTICAL DATA TABULATION

VOR Approach to RWY 07 from AKBIN(IAF)		
Fix/point		Coordinates
AKBIN(IAF)	- 12 DME ARC /12.00 NM YDM	33°31'21.5"N 126°14'55.3"E
D12.0 YDM(IF)	- BRG 64.55°/12.00 NM YDM	33°24'10.5"N 126°17'12.1"E
D8.4 YDM(SDF)	- BRG 64.58°/8.40 NM YDM	33°26'07.9"N 126°20'48.9"E
D6.3 YDM(FAF)	- BRG 64.60°/6.30 NM YDM	33°27'16.3"N 126°22'55.4"E
D4.5 YDM(SDF)	- BRG 64.62°/4.50 NM YDM	33°28'14.9"N 126°24'43.9"E
D2.4 YDM(MAPt)	- BRG 64.63°/2.40 NM YDM	33°29'23.3"N 126°26'50.6"E
THR RWY 07	Final approach descent angle 3.14°(FAF - SDF) / 3.02°(SDF - THR)	33°29'59.57"N 126°28'06.50"E
YDM VOR/DME		33°30'41.3"N 126°29'15.3"E
D4.0 YDM	- BRG 64.66°/4.00 NM YDM	33°32'51.3"N 126°33'16.9"E
PETAA	- BRG 95.70°/22.00 NM YDM	33°31'18.0"N 126°55'34.0"E

JEJU	APP	121.2
		124.05
JEJU	TWR	118.2
		118.55

ILS Z or LOC Z RWY 25

ELEV, ALT IN FEET
DIST IN NM
BRG ARE MAG
VAR 7° W

MOA 40
5 000 AMSL
SFC

RK R126
3 000 AMSL
GND

MOA 41
5 000 AMSL
SFC

CATA 3
7 000 AMSL
SFC

CATA 6
7 000 AMSL
4 000 AMSL

(MAHF) LOTKA
MAX ALT 11 000
MIN ALT 6 000
MAX SPD 210 kts IAS
071°
251°
1 min

PC403
263°
(255.6°T)

LOC 111.3
ICHE

A 558
246°
(238.5°T)

A 1178
246°
(238.5°T)

(FAF) LOC ONLY
ICHE D5.3
246°
(238.5°T)

(IF) TOKIN
5.3
246°
(238.5°T)

(IAF) DUKAL
5.0
246°
(238.6°T)

(FAF) ICHE D5.3
33°33'36"N
126°35'09"E

(MAPD) LOC ONLY
ICHE P1.0
246°
(238.5°T)

ELEVATIONS
TFT
LEGEND
7000
6000
5000
4000
3000
2000
1000
Sea Level
ELEVATIONS ARE IN FEET

NO CIRCLING
Circling approach area limits
P15
25.2 NM (CAT B)
4.14 NM (CAT C)
057°
141°

NOTE
1. RNAV 1 operation.
2. GNSS required.
3. ATS surveillance service required.
4. DME required on an ILS/LOC approach.


SCALE 1 : 500000
0 10 km
0 5 NM

True North

MSA 25 NM JEJU ARP
3800
285°
065°
8500

RECOMMENDED PROFILE(LOC ONLY)	DME ICHE	5	4	3	2	1.0	MISSED APPROACH Climb to 6 000 ft on track of 246° to PC403, then RIGHT turn on track of 263° to LOTKA and Hold at 6000 ft.
Final Approach Gradient 5.32%, 323 ft/NM	ALT(HGT)	1 691 (1 615)	1 368 (1 292)	1 045 (969)	722 (646)	400 (324)	

TRANSITION ALT	14 000
TRANSITION LVL	FL 140

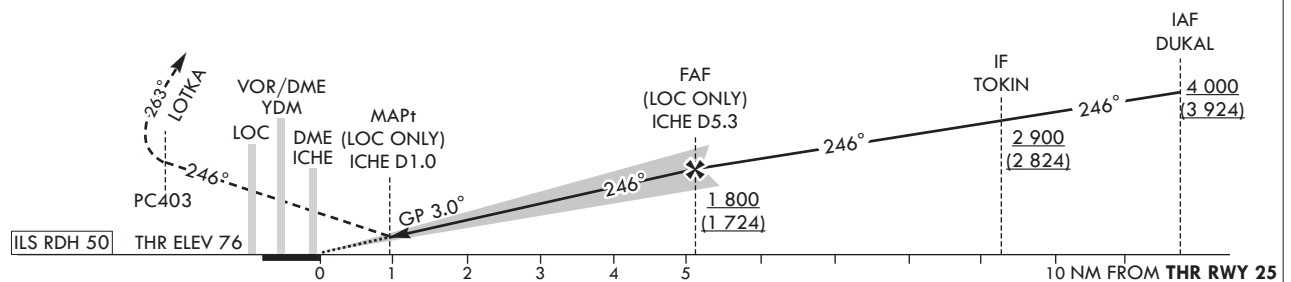

OCA (H)		A	B	C	D	DL							
Straight-in Approach	CAT-I	276 (200)					Rate of descent	Knots V/V fpm	60 318	90 478	120 637	150 796	180 955
	LOC	540 (464)					* Timing Not authorized for defining MAPt. * OCH for Circling related to aerodrome ELEV 119 ft.						
Circling		680 (561)	890 (771)	1 380 (1 261)	N/A								

AIRAC AIP AMDT 9/24
Effective : 1600UTC 30 OCT 2024

AERONAUTICAL DATA TABULATION

ILS Z or LOC Z Approach to RWY 25 from DUKAL(IAF)		
Fix/point		Coordinates
DUKAL(IAF)		33°38'58.6"N 126°45'38.8"E
TOKIN(IF)	BRG 246.03°/5.00 NM	33°36'21.9"N 126°40'32.2"E
D5.3 ICHE(FAF LOC only)	BRG 245.98°/5.34 NM ICHE	33°33'36.4"N 126°35'08.7"E
D1.0 ICHE(MAPt LOC only)	BRG 245.93°/1.00 NM ICHE	33°31'20.0"N 126°30'43.0"E
THR RWY 25		33°30'53.56"N 126°29'51.51"E
DME ICHE		33°30'51.4"N 126°29'39.1"E
PC403		33°22'44.4"N 126°14'03.0"E
LOTKA		33°21'11.1"N 126°06'52.2"E

**INSTRUMENT
APPROACH
CHART - ICAO**


AERODROME ELEV 119 ft
HEIGHTS RELATED TO
THR RWY 25 - ELEV 76 ft

JEJU APP 121.2
124.05
JEJU TWR 118.2
118.55

JEJU/Jeju Intl(RKPC)

ILS Y or LOC Y RWY 25

Note : Approach under ICAO Flight Procedure.

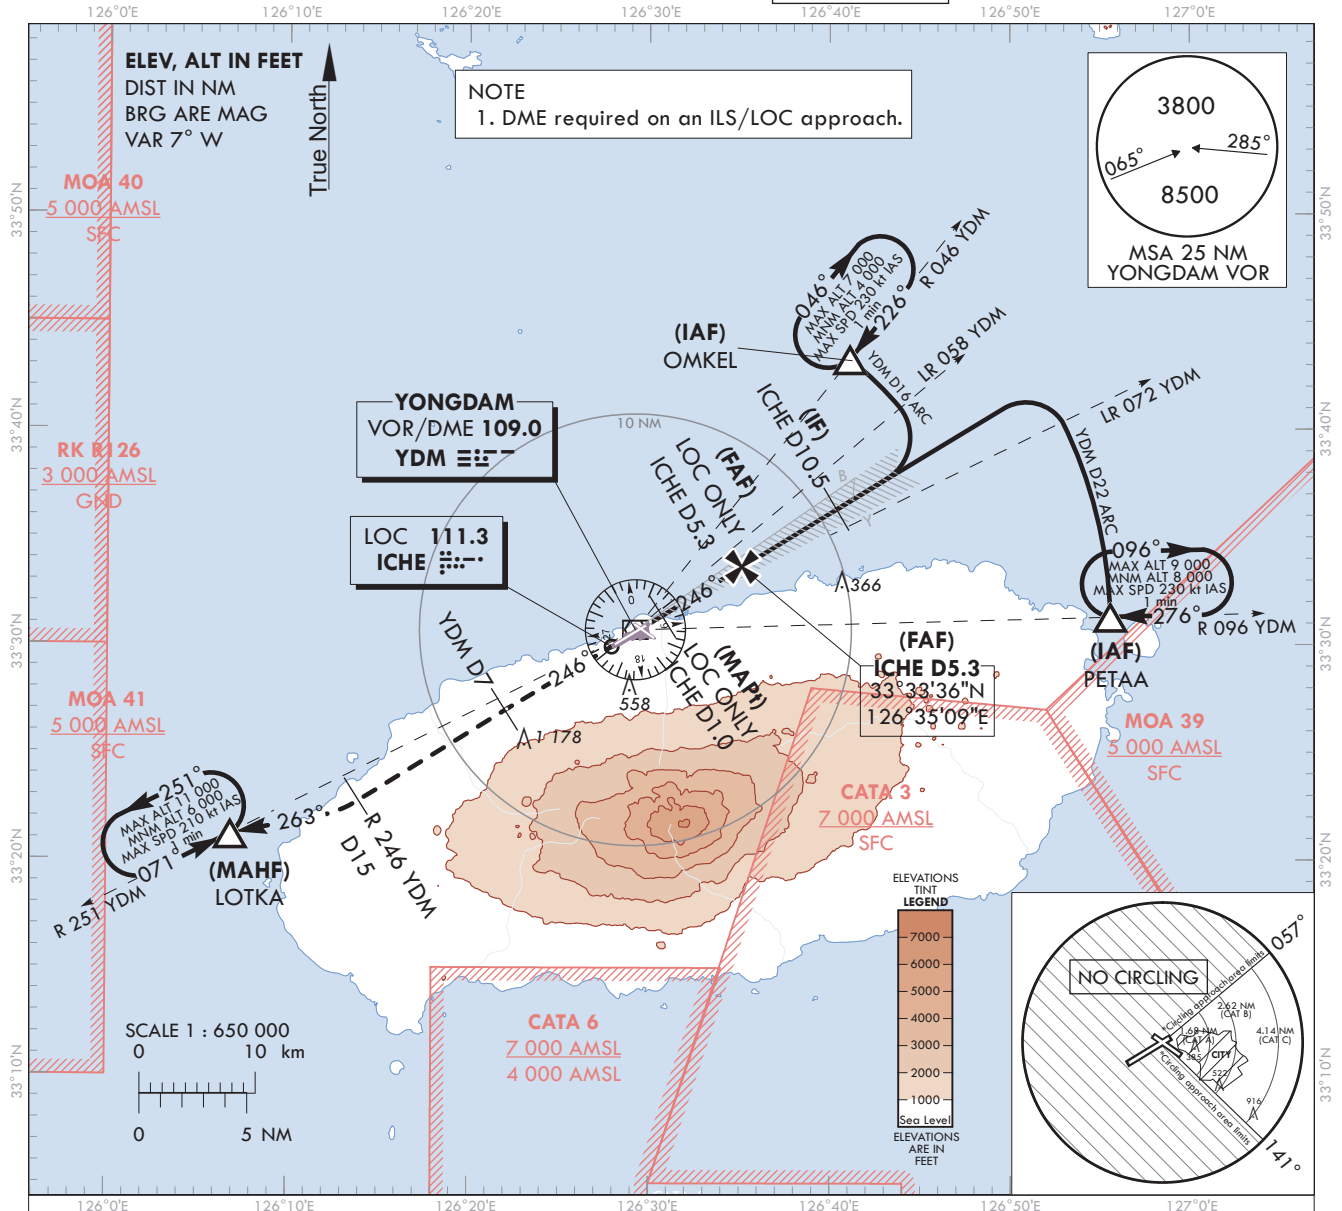

AERONAUTICAL DATA TABULATION


ILS Y or LOC Y Approach to RWY 25 from OMKEL(IAF) or PETAA(IAF)			
Fix/point		Coordinates	
OMKEL(IAF)	16 DME ARC /16.00 NM YDM	33°43'16.2"N	126°41'08.0"E
PETAA(IAF)	22 DME ARC /22.00 NM YDM	33°31'18.0"N	126°55'34.0"E
D10.5 ICHE(IF)	BRG 245.98°/10.50 NM ICHE	33°36'18.2"N	126°40'24.9"E
D5.3 ICHE(FAF LOC only)	BRG 245.93°/5.34 NM ICHE	33°33'36.4"N	126°35'08.7"E
D1.0 ICHE(MAPt LOC only)	BRG 245.93°/1.00 NM ICHE	33°31'20.0"N	126°30'43.0"E
THR RWY 25		33°30'53.56"N	126°29'51.51"E
DME ICHE		33°30'51.4"N	126°29'39.1"E
YDM VOR/DME		33°30'41.3"N	126°29'15.3"E
D7.0 YDM	BRG 246.34°/7.00 NM YDM	33°26'59.7"N	126°22'08.6"E
D15.0 YDM	BRG 245.59°/15.00 NM YDM	33°22'45.9"N	126°14'01.5"E
LOTKA	BRG 262.70°/21.00 NM YDM	33°21'11.1"N	126°06'52.2"E

INSTRUMENT
APPROACH
CHART - ICAOAERODROME ELEV 119 ft
HEIGHTS RELATED TO
THR RWY 25 - ELEV 76 ftJEJU APP 121.2
JEJU TWR 124.05
118.2
118.55


JEJU/Jeju Intl(RKPC)

RNP RWY 25

Note : Approach under ICAO Flight Procedures.

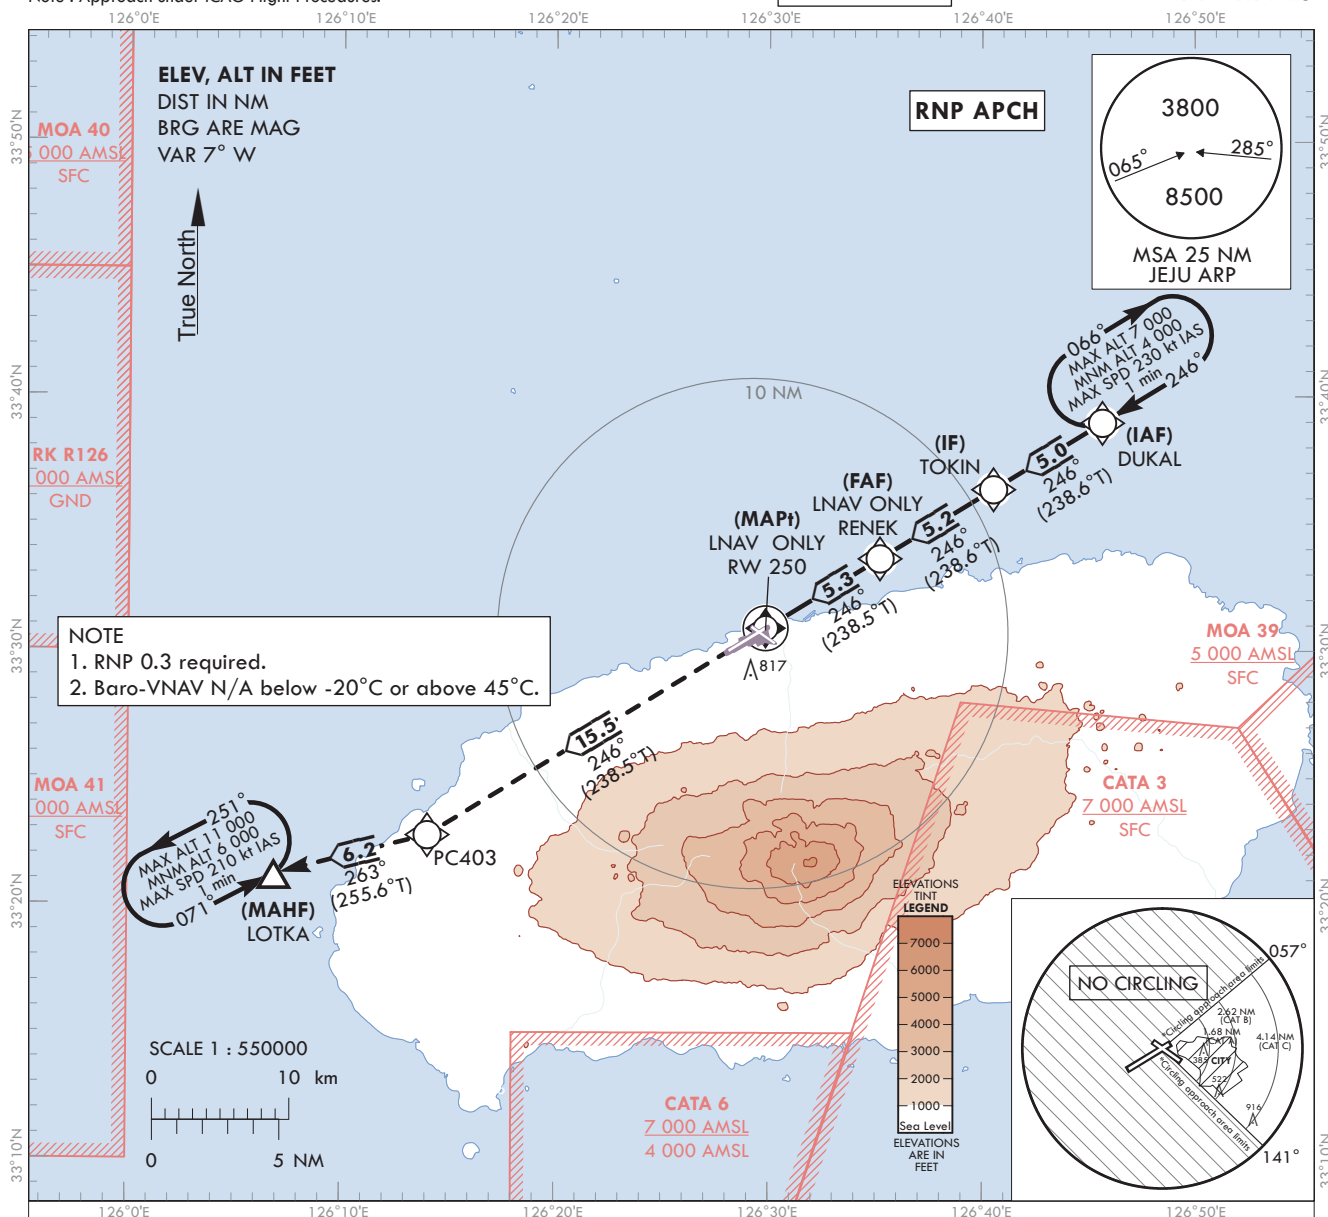

MISSED APPROACH

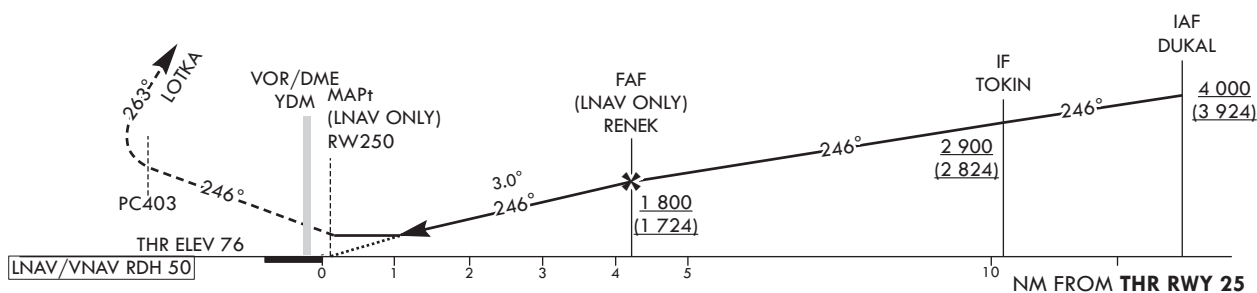Climb to 6 000 ft on track of 246° to PC403, then RIGHT turn
on track of 263° to LOTKA and hold at 6000 ft.TRANSITION ALT 14 000
TRANSITION LVL FL 140

OCA (H)		A	B	C	D							
Straight-in Approach	LNAV/VNAV	620 (544)				Rate of descent	Knots	60	90	120	150	180
	LNAV	810 (734)					V/V fpm	319	478	637	797	956
Circling		680 (561)	890 (771)	1 380 (1 261)	N/A	* Timing Not authorized for defining MAPt. * OCH for Circling related to aerodrome ELEV 119 ft.						

Change : Information of landing minima(OCA(H)).

AERONAUTICAL DATA TABULATION

Instrument Approach Procedure Coding Tables

RNP RWY 25

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	DUKAL	-	-	-	-	+4 000	-	33°38'58.6"N 126°45'38.8"E	-	RNP APCH	IAF
002	TF	TOKIN	-	246(238.6)	5.0	-	+2 900	-	33°36'21.9"N 126°40'32.2"E	-	RNP APCH	IF
003	TF	RENEK	-	246(238.6)	5.2	-	+1 800	-	33°33'38.6"N 126°35'13.1"E	-	RNP APCH	FAF
004	TF	RW250	Y	246(238.5)	5.3	-	+810	-	33°30'53.6"N 126°29'51.5"E	-3.00/50	RNP APCH	MAPt
005	TF	PC403	-	246(238.5)	15.5	-	-	-	33°22'44.4"N 126°14'03.0"E	-	RNP APCH	-
006	TF	LOTKA	Y	263(255.6)	6.2	-	-	-	33°21'11.1"N 126°06'52.2"E	-	RNP APCH	-
007	HM	LOTKA	Y	071(063.2)	-	L	-11 000 +6 000	-210	33°21'11.1"N 126°06'52.2"E	-	RNP APCH	1 min (Outbound timing)

HOLDING PROCEDURE

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(T)	TIME (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
RNP RWY 25	HM	DUKAL	Y	246(238.6)	1.0	R	-7 000 +4 000	-230	33°38'58.6"N 126°45'38.8"E	-	RNAV 1	-


AERODROME ELEV 119 ft
HEIGHTS RELATED TO
THR RWY 25 - ELEV **76 ft**

JEJU APP	121.2
	124.05
JEJU TWR	118.2
	118.55

JEJU/Jeju Intl(RKPC)

VOR RWY 25


Note : Approach under ICAO Flight Procedures.

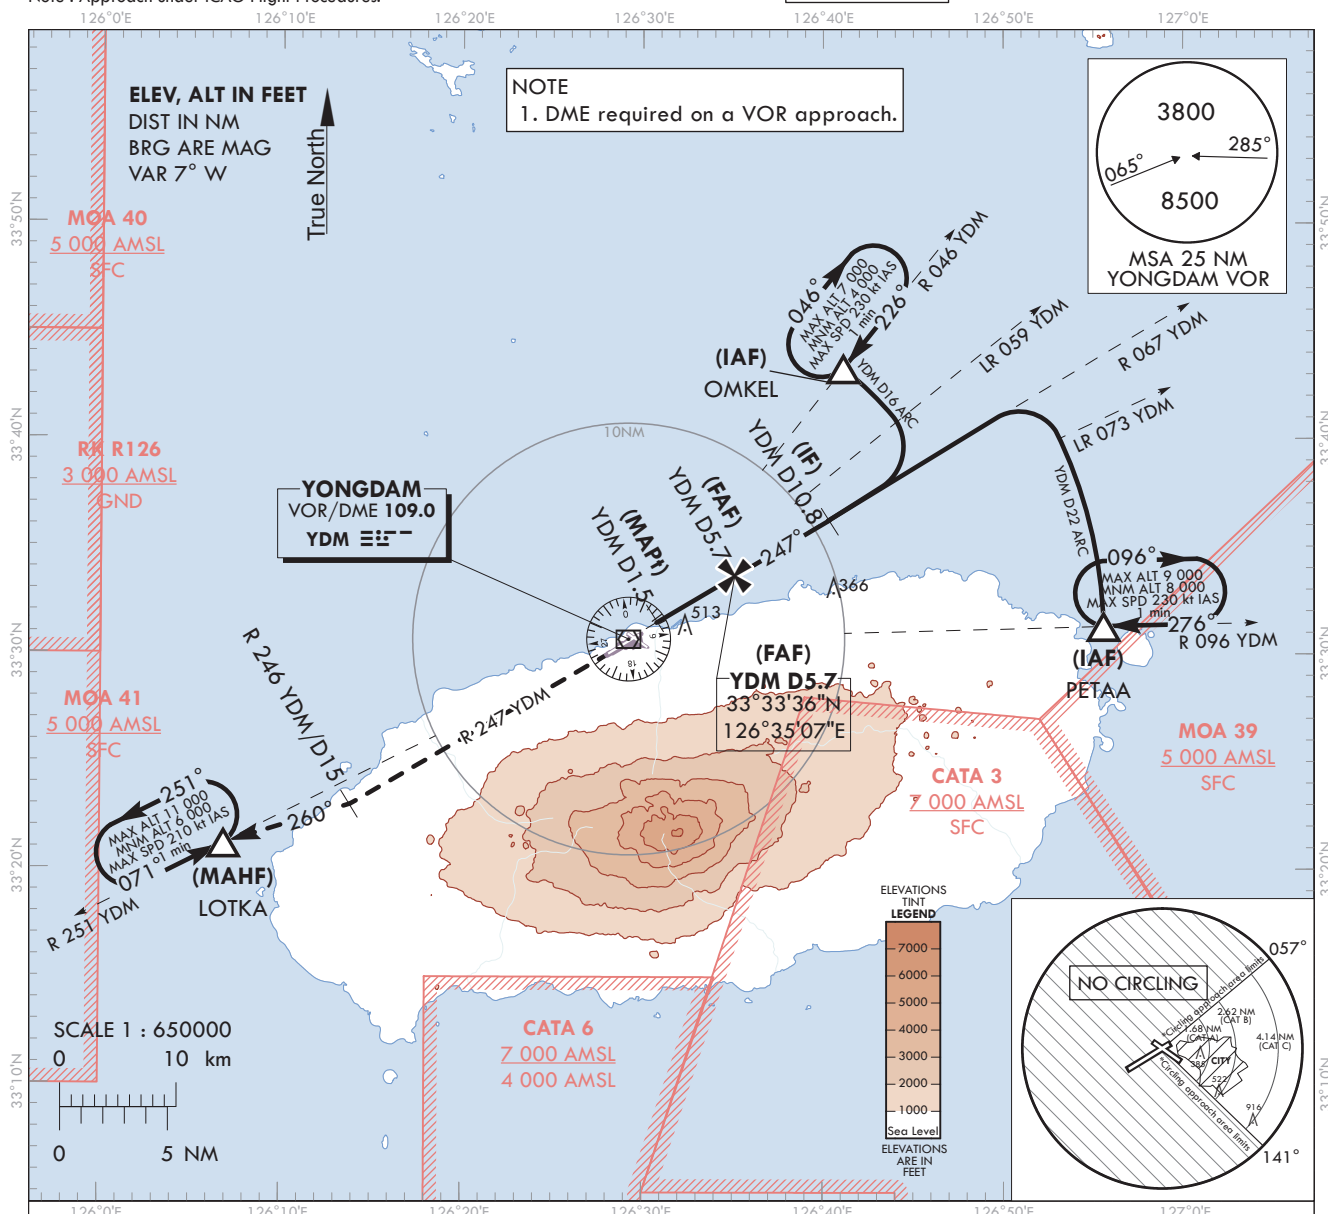

Climb on R 247 YDM until 15 DME, then turn Right
HDG 260° to LOTKA and Hold at 6 000 ft.

RECOMMENDED PROFILE	DME YDM	5	4	3	2.2
Final Approach Gradient 5.34%, 325 ft/NM	ALT(HGT)	1 573 (1 497)	1 248 (1 172)	924 (848)	650 (574)

TRANSITION ALT	14 000
TRANSITION LVL	FL 140

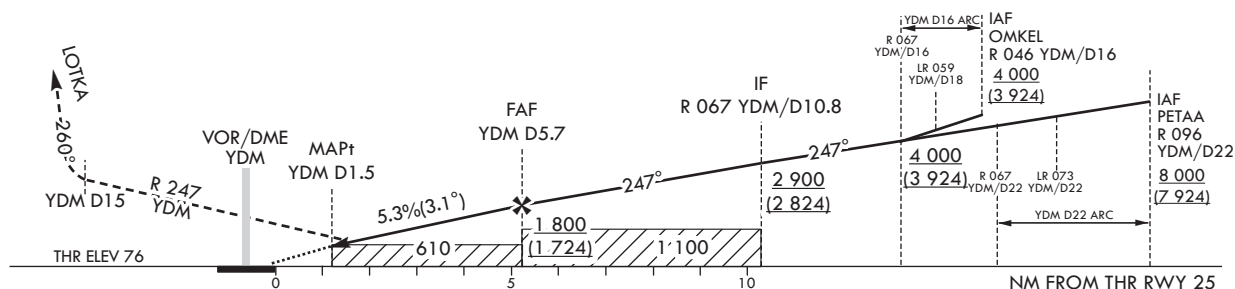

OCA (H)	A	B	C	D
Straight-in Approach	610 (534)			
Circling	680 (561)	890 (771)	1 380 (1 261)	N/A

* Timing Not authorized for defining MAPt.
* OCH for Circling related to aerodrome
ELEV 119 ft.

Change : Information of landing minima(OCA(H)).				
---	--	--	--	--

AERONAUTICAL DATA TABULATION

VOR Approach to RWY 25 from OMKEL(IAF) or PETAA(IAF)		
Fix/point		Coordinates
OMKEL(IAF)	- 16 DME ARC/16.00 NM YDM	33°43'16.2"N 126°41'08.0"E
PETAA(IAF)	- 22 DME ARC/22.00 NM YDM	33°31'18.0"N 126°55'34.0"E
D10.8 YDM(IF)	- BRG 246.76°/10.80 NM YDM	33°36'12.8"N 126°40'22.1"E
D5.7 YDM(FAF)	- BRG 246.76°/5.70 NM YDM	33°33'36.4"N 126°35'07.1"E
D1.5 YDM(MAPt)	- BRG 246.71°/1.50 NM YDM	33°31'27.2"N 126°30'47.4"E
THR RWY 25	Final approach descent angle 3.06°	33°30'53.56"N 126°29'51.51"E
YDM VOR/DME		33°30'41.3"N 126°29'15.3"E
D15.0 YDM	- BRG 246.67°/15.00 NM YDM	33°22'59.4"N 126°13'51.7"E
LOTKA	- BRG 260.35°/21.00 NM YDM	33°21'11.1"N 126°06'52.2"E