


**INSTRUMENT
APPROACH
CHART**

Note : Approach under U.S TERPS.

AERODROME ELEV 330 ft
HEIGHTS RELATED TO
THR RWY 21 - ELEV 330 ft

WONJU APP 141.2
292.6 255.0
WONJU TWR 126.2 118.325
236.6 265.5

WONJU/wonju (RKNW)
RNAV(GNSS)
RWY 21

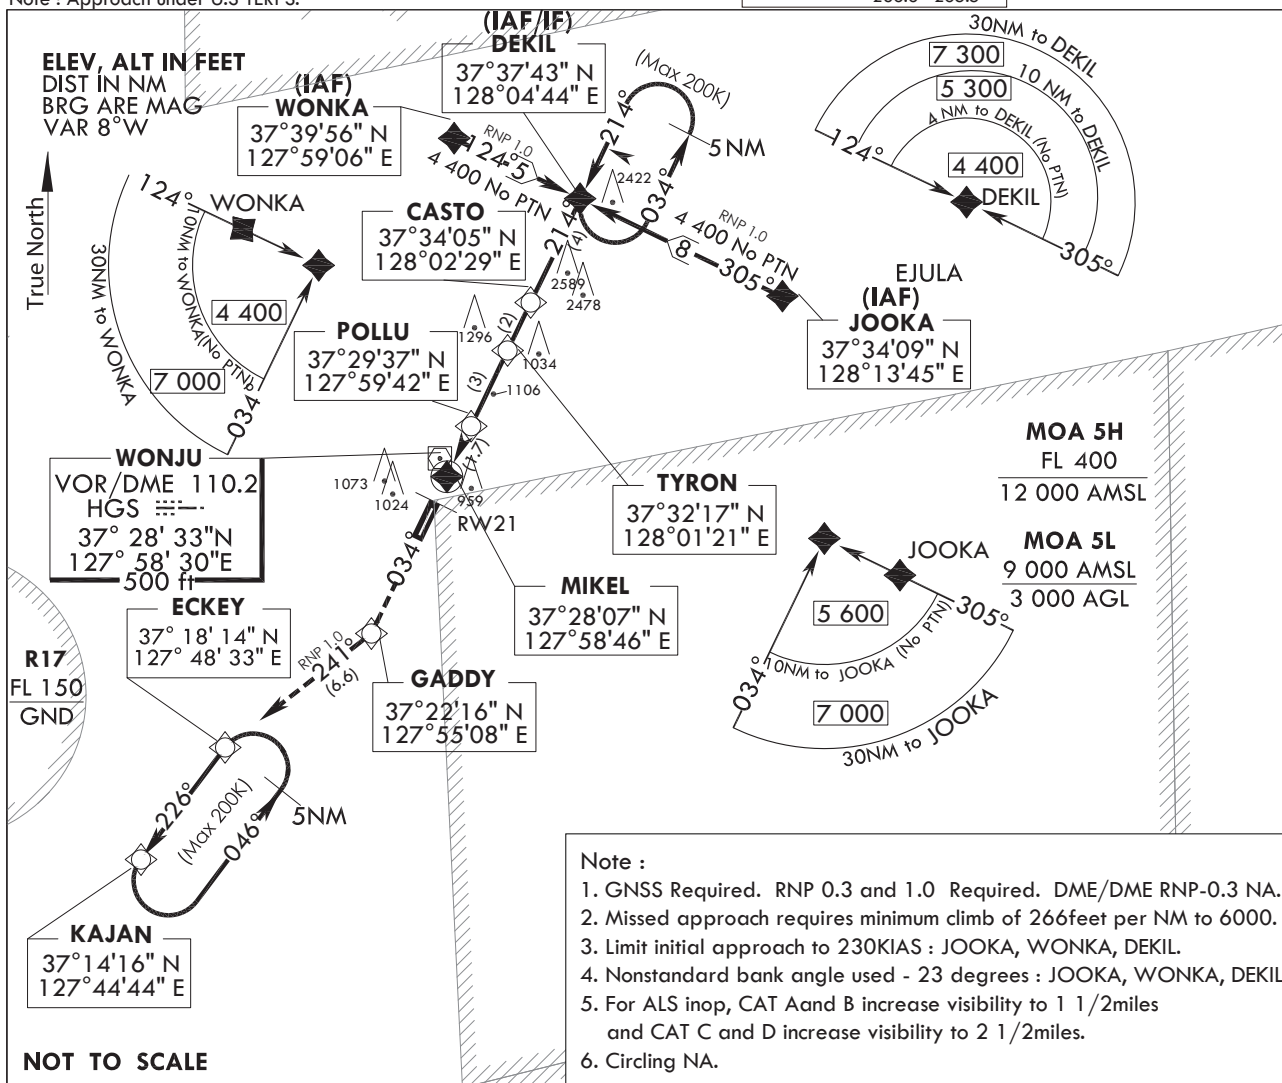


※ VGSI : Visual Glide Slope Indicator
VPA : Vertical Pass Angle
TCH : Threshold Crossing Height
No PTN : No Procedure Turn Required

TRANSITION ALT 14 000
TRANSITION LVL FL140

MISSED APPROACH

Climb to 6 000 on track 214° to GADDY, then track 241° to ECKEY, then track 226° to KAJAN and hold.

VGSI and descent angles not coincident
(VGSI angle 3.25/TCH54)

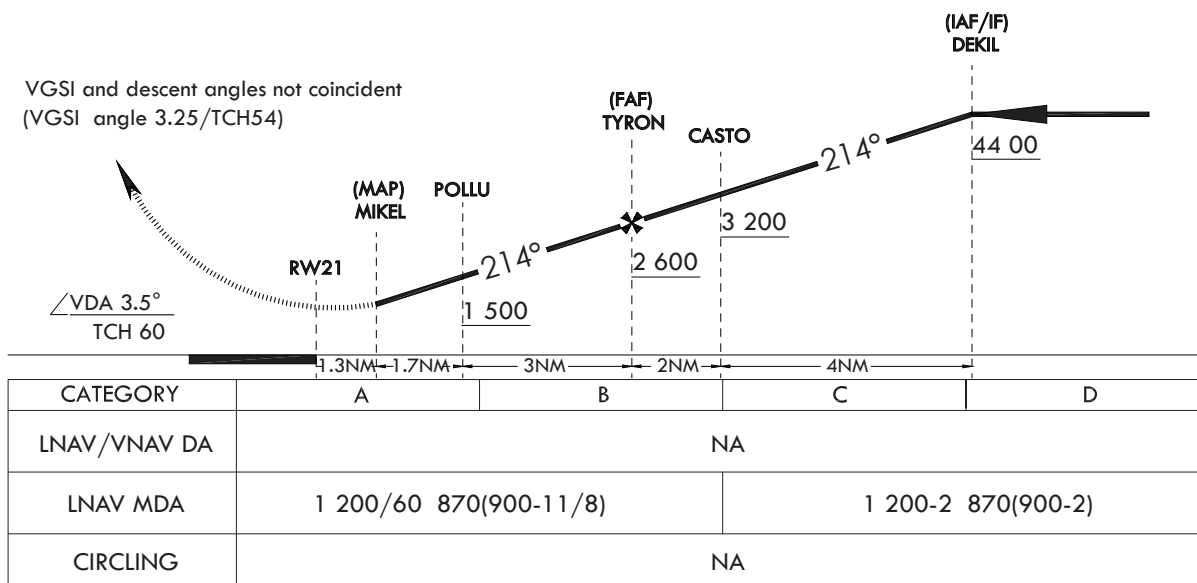

Change : New procedure.

WONJU/wonju (RKNW)
RNAV(GNSS)
RWY 21

AERONAUTICAL DATA TABULATION

INSTRUMENT APPROACH PROCEDURE CODING TABLES

RNAV(GNSS) RWY 21

Serial Number	Path Descriptor	Waypoint Identifier	Fly -Over	Course/Track ° M(° T)	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KT)	Coordinates	VPA /TCH	Navigation specification	Remarks
001	-	JOOKA	-	-	-	-	+5 600	-230	373408.84 N 1281345.2 7E	-	RNPAPCH	IAF
002	TF	DEKIL	-	305(296.5)	8.0	-	+4 400	-230	373742.86 N 1280444.26 E	-	RNPAPCH	IAF/IF

RNAV(GNSS) RWY 21

Serial Number	Path Descriptor	Waypoint Identifier	Fly -Over	Course/Track ° M(° T)	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KT)	Coordinates	VPA /TCH	Navigation specification	Remarks
001	-	WONKA	-	124(116.3)	5.0	-	+4 400	-230	373956.27 N 1275905.69 E	-	RNPAPCH	IAF
002	TF	DEKIL	-	-	-	-	+4 400	-230	373742.86 N 1280444.26 E	-	RNPAPCH	IAF/IF
003	TF	CASTO	-	214(206.4)	4.0	-	+3 000	-230	373405.59 N 1280228.87 E	-	RNPAPCH	-
004	TF	TYRON	-	214(206.4)	2.0	-	+2 600	-	373216.91 N 1280121.18 E	-	RNPAPCH	FAF
005	TF	POLLU	-	214(206.4)	3.0	-	+1 500	-	372937.54 N 1275942.09 E	-	RNPAPCH	-
006	TF	MIKEL	FO	214(206.4)	1.7	-	1 200	-	372806.75 N 1275845.69 E	-	RNPAPCH	-

MISSED Approach

Serial Number	Path Descriptor	Waypoint Identifier	Fly -Over	Course/Track ° M(° T)	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KT)	Coordinates	VPA /TCH	Navigation specification	Remarks
001	TF	MIKEL	-	-	-	-	-	-	372806.75 N 1275845.69 E	-	RNPAPCH	-
002	TF	GADDY	-	214(206.3)	6.5	-	-	-	372216.20 N 1275508.33 E	-	RNPAPCH	CG 266 ft/NM TO 6 000 ft
003	TF	ECKEY	-	241(232.6)	6.6	-	-	-	371814.41 N 1274832.66 E	-	RNPAPCH	CG 266 ft/NM TO 6 000 ft
004	TF	KAJAN	-	226(217.6)	5.0	-	6 000	-	371416.30 N 1274443.60 E	-	RNPAPCH	-

HOLDING Data

Serial Number	Path Descriptor	Waypoint Identifier	Fly -Over	Course/Track ° M(° T)	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KT)	Coordinates	VPA /TCH	Navigation specification	Remarks
001	TF	DEKIL	-	214(206.4)	5.0	L	4 400	-200	373408.84 N 1281345.2 7E	-	RNPAPCH	Hold at DEKIL NE left Turn 214° Inbound 5 NM Leg
002	TF	KAJAN	-	226(217.6)	5.0	L	6 000	-200	373742.86 N 1280444.26 E	-	RNPAPCH	Hold at KAJAN NE Left Turn 226° Inbound 5 NM Leg.

Change : New procedure.

**INSTRUMENT
APPROACH
CHART**

Note : Approach under U.S.TERPS.

AERODROME ELEV 330 ft
HEIGHTS RELATED TO
THR RWY 21 - ELEV 330 ft


WONJU APP 141.2
292.6 255.0
WONJU TWR 126.2 118.325
236.6 265.5

WONJU/wonju (RKNW)
RNAV(GNSS)
RWY 03

ELEV, ALT IN FEET
DIST IN NM
BRG ARE MAG
VAR 8°W

- Note :
1. GNSS Required. RNP 0.3 and 1.0 Required. DME/DME RNP-0.3 NA.
 2. Missed approach requires minimum climb of 355 ft per NM to 6 000 ft.
 3. Limit initial approach to max 220 KIAS.
 4. Bank angle used - 23 degrees : RHODE, MADAE, PADON.
 5. For ALS inop, CAT A and B increase visibility to 1 1/2 miles and CAT C and D increase visibility to 2 1/2 miles.
 6. Circling NA.
 7. When VGSI inop, procedure NA at night.

Note : 1 145 ft was not considered as final approach controlling OBS due to close to SDF.

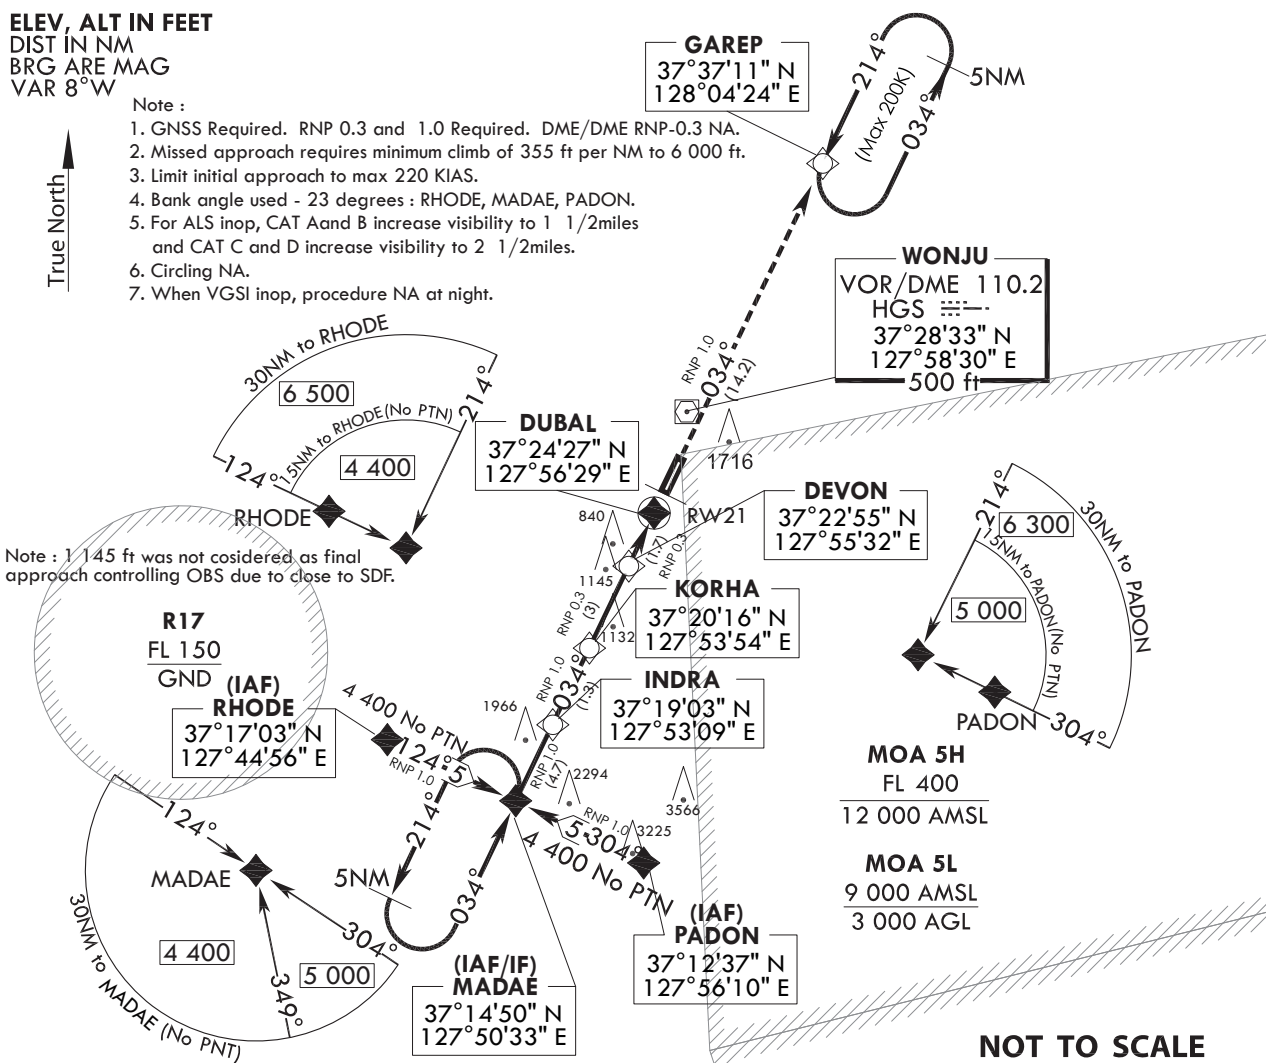


※ VGSI : Visual Glide Slope Indicator
VPA : Vertical Pass Angle
TCH : Threshold Crossing Height
No PTN : No Procedure Turn Required

TRANSITION ALT 14 000
TRANSITION LVL FL140

MISSED APPROACH

Climb to 6 000 ft on track 034° to GAREP and HOLD.

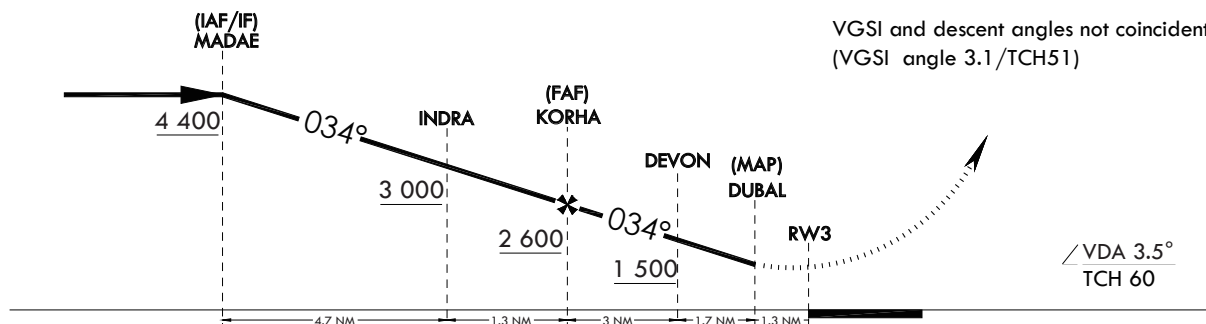

CATEGORY	A	B	C	D
LNAV/VNAV DA	NA			
LNAV MDA	1 160/60 835(900-11/8)		1 160-17/8 835(900-17/8)	
CIRCLING	NA			

Change : New procedure.

WONJU/wonju (RKNW)
RNAV(GNSS)
RWY 03

AERONAUTICAL DATA TABULATION

INSTRUMENT APPROACH PROCEDURE CODING TABLES

RNAV(GNSS) RWY 03

Serial Number	Path Descriptor	Waypoint Identifier	Fly -Over	Course/Track ° M(° T)	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KT)	Coordinates	VPA /TCH	Navigation specification	Remarks
001	–	RHODE	–	–	–	–	+4 400	-22'0	371703.21 N 1274455.61 E	–	RNPAPCH	IAF
002	TF	NADAE	–	124(116.2)	5.0	–	+4 400	-220	371450.45 N 1275032.84 E	–	RNPAPCH	IAF /IF

RNAV(GNSS) RWY 03

Serial Number	Path Descriptor	Waypoint Identifier	Fly -Over	Course/Track ° M(° T)	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KT)	Coordinates	VPA /TCH	Navigation specification	Remarks
001	–	PADON	–	304(296.3)	5.0	–	+5 000	-220	371237.42 N 1275609.75 E	–	RNPAPCH	IAF
002	TF	MADAE	–	–	–	–	+4 400	-220	371450.45 N 1275032.84 E	–	RNPAPCH	IAF /IF
003	TF	INDRA	–	034(026.3)	4.7	–	+3 000	-220	371903.51 N 1275309.14 E	–	RNPAPCH	–
004	TF	KORHA	–	034(026.3)	1.3	–	+2 600	-200	372015.88 N 1275353.87 E	–	RNPAPCH	FAF
005	TF	DEVON	–	034(026.3)	3.0	–	+1 500	–	372255.32 N 1275532.56 E	–	RNPAPCH	–
006	TF	DUBAL	FO	034(026.3)	1.7	–	1 160	–	372426.96 N 1275629.33 E	–	RNPAPCH	–

MISSED Approach

Serial Number	Path Descriptor	Waypoint Identifier	Fly -Over	Course/Track ° M(° T)	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KT)	Coordinates	VPA /TCH	Navigation specification	Remarks
001	–	DUBAL	–	–	–	–	–	–	372426.96 N 1275629.33 E	–	RNPAPCH	–
002	TF	GAEP	–	034(206.3)	14.2	–	+6 000	–	373710.88 N 1280424.31 E	–	RNPAPCH	CG 355 ft/NM TO 6 000 ft

HOLDING Data

Serial Number	Path Descriptor	Waypoint Identifier	Fly -Over	Course/Track ° M(° T)	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KT)	Coordinates	VPA /TCH	Navigation specification	Remarks
001	TF	MADAE	–	034(026.3)	5.0	L	4 400	–	371450.45 N 1275032.84 E	–	RNPAPCH	Hold at MADAE SW Left Turn 034° Inbound 5 NM Leg
002	TF	GAREP	–	034(026.3)	5.0	L	6 000	–	373710.88 N 1280424.31 E	–	RNPAPCH	Hold at GAREP NE Left Turn 214° Inbound 5 NM Leg.

Change : New procedure.


**INSTRUMENT
APPROACH
CHART**

AERODROME ELEV **329** FT
HEIGHTS ELEV TDZ **329** FT

WONJU DEP	130.2	134.1
	268.5	
WONJU TWR	265.5	118.325
	236.6	126.2

WONJU/Wonju (RKNW)
VOR/DME A


Note : Approach and circle to land under U.S. TERPS.

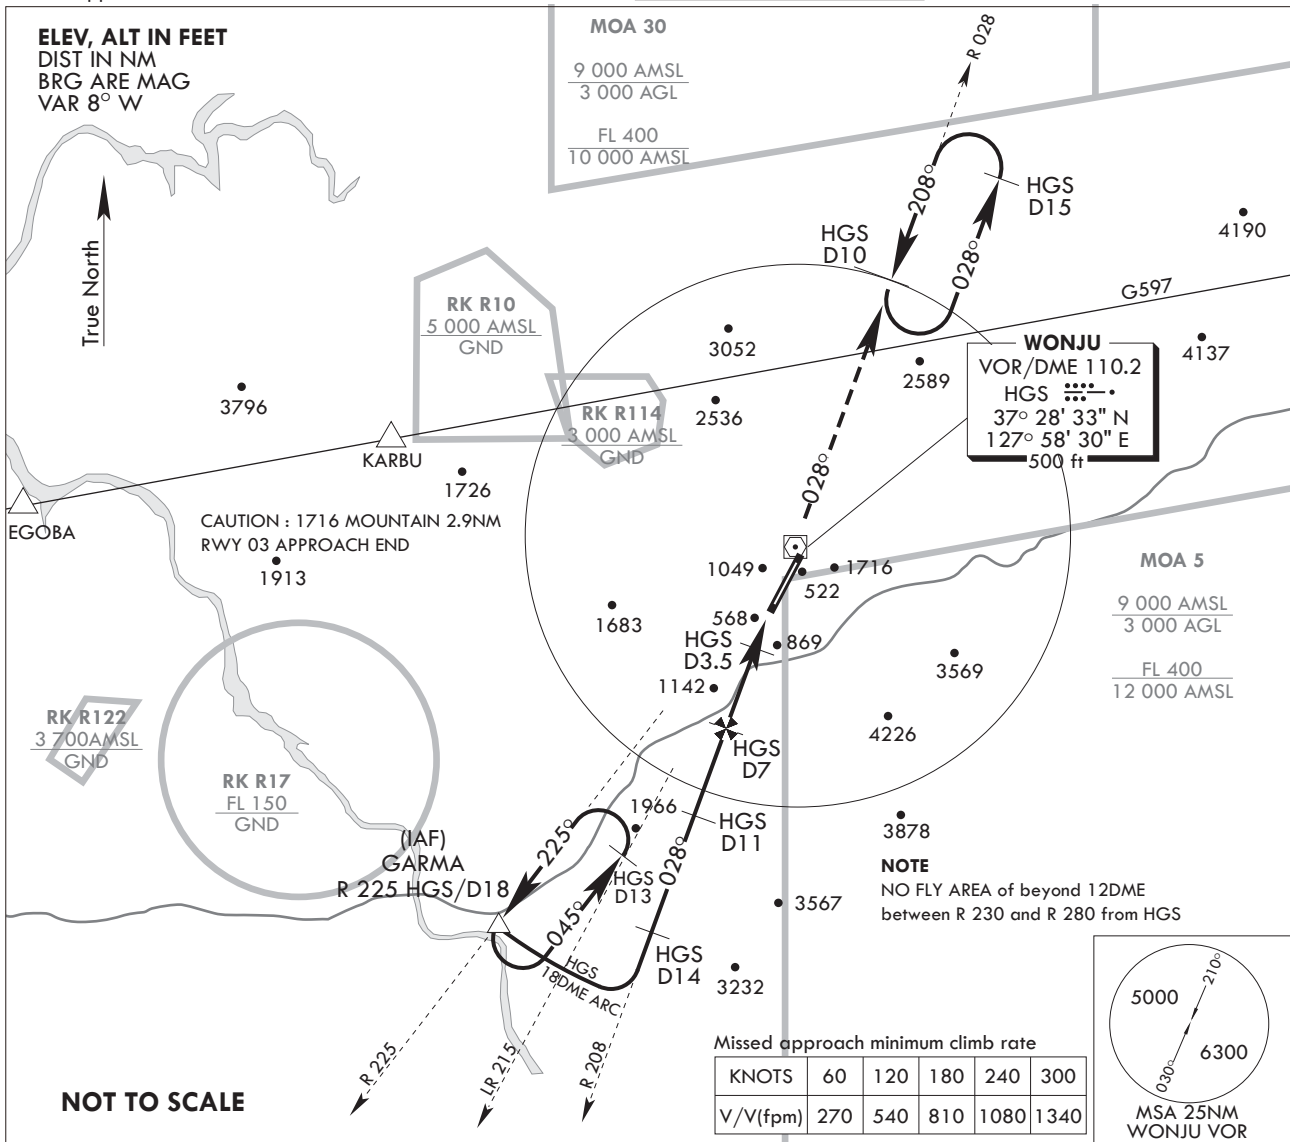

TRANSITION ALT 14 000
TRANSITION LVL FL 140

MISSED APPROACH

Climb on R 028 HGS to 10DME until 6 000 and hold

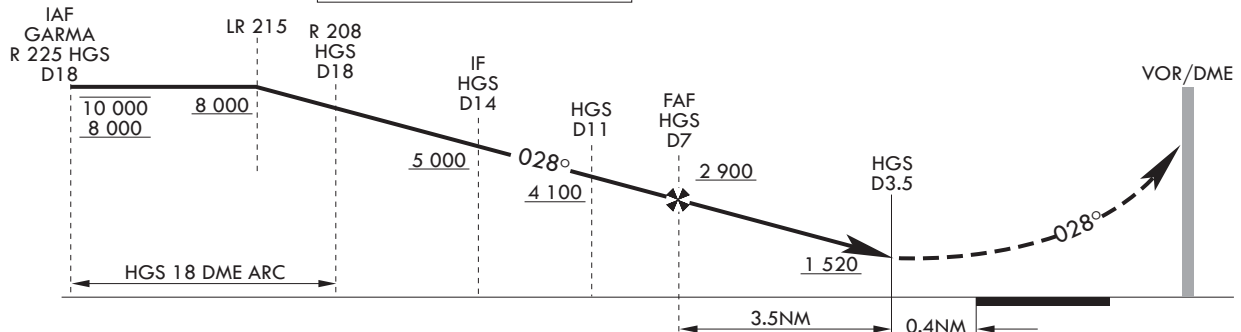

CATEGORY	A	B	C	D
S-VOR/DME 03	NOT AUTHORIZED			
CIRCLING	1460-11/4 1131(1200-11/4)	1460-11/2 1131(1200-11/2)	1460-3 1131(1200-3)	1520-3 1191(1200-3)

Circling not authorized E of RWY 03/21

Change : Fix name(ENKAS → EGOBA).

INTENTIONALLY

LEFT

BLANK